



# Preliminary

## TX-3535L3FC120-OGFEND34-01 DATA SHEET

Approved by:

Checked by:

Prepared by:

<b>Part No.</b>	TX-3535L3FC120-OGFEND34-01	<b>Spec No.</b>	WKF-BE0078	<b>Page</b>	1 of 7
-----------------	----------------------------	-----------------	------------	-------------	--------


**Features:**

- ◆ Excellent Transiting Heat from LED Chip Operating under 700mA
- ◆ High Luminous Output
- ◆ No UV

**Typical purpose:**

- ◆ Portable Flashlight
- ◆ Garden lighting
- ◆ General Lighting

**Package Dimensions:**

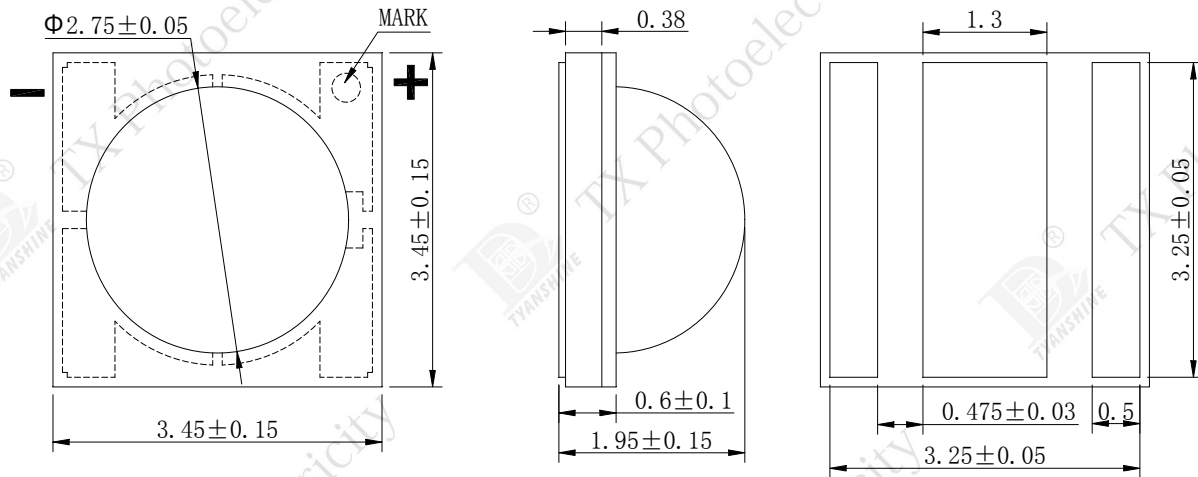

**Notes:**

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25$  mm (0.01") unless otherwise noted.

Part NO.	Lens Color	Emitting Color
TX-3535L3FC120-OGFEND34-01	Water Clear	Lime

**Absolute Maximum Ratings at Ta=25°C**

Parameter	Symbol	MAX.	Unit
LED Junction Temperature	T <sub>j</sub>	135	°C
Power Dissipation	P <sub>D</sub>	2450	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	I <sub>FP</sub>	1000	mA
Continuous Forward Current	I <sub>F</sub>	700	mA
Reverse Voltage	V <sub>R</sub>	5	V
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Operating Temperature Range	T <sub>opr</sub>	-20 to +70	°C
Storage Temperature Range	T <sub>spr</sub>	-30 to +100	

**Notes:**

1. Specifications are subject to change without notice.
2. Under the stipulated Characteristics parameters above, the life span of the LED is more than 50,000hours.
3. The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
4. Precautions for ESD:  
 STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

**Characteristics at  $I_f=350\text{mA}$  ,  $V_r=5\text{V}$  ( $T_a=25^\circ\text{C}$ ):**

Parameter	Symbol	Values			Units
		Min.	Typ.	Max.	
Luminous Flux	$\phi_v$	180	230	—	lm
Viewing Angle at 50% IV	$2\theta_{1/2}$	—	120	—	Deg
Forward Voltage	$V_f$	2.7	3.1	3.5	V
Peak Emission Wavelength	$\lambda_p$	540	543	546	nm
Dominant Wavelength	$\lambda_d$	562	565	568	nm
Correlated Colour Temperature	CCT	4000	—	4500	K
Spectral Line Half-Width	$\Delta\lambda$	100	105	110	nm
Reverse Current	$I_R$	—	—	10	$\mu\text{A}$
Thermal Resistance Junction to Case	$R\theta_{J-C}$	—	6.5	—	K/W
Temperature Coefficient of Forward Voltage	$V\Delta F/T$	—	-2	—	mV/ $^\circ\text{C}$

**Product spectral parameters level table:**






Grade	Colour temperature $T_c(\text{K})$	X1		X2		X3		X4	
		X	Y	X	Y	X	Y	X	Y
J6	4000-4500	0.4030	0.5465	0.4130	0.5465	0.4172	0.5556	0.4072	0.5556

**Notes:**

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2.  $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity
3. The dominant wavelength ( $\lambda_d$ ) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
4. Flux is measured with an accuracy of  $\pm 15\%$ .
5. Forward voltage is measured with an accuracy of  $\pm 0.15\text{V}$ .

## Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

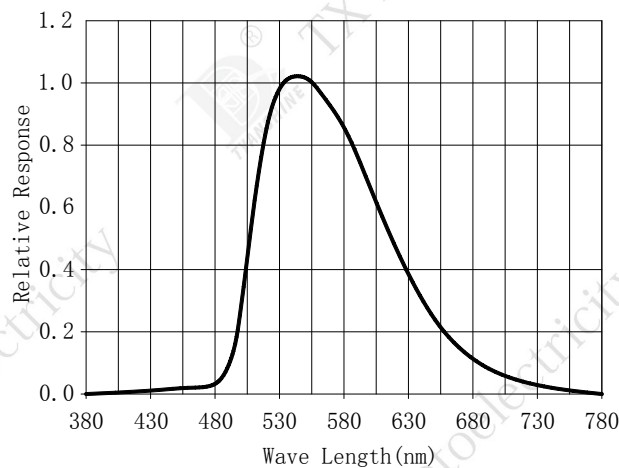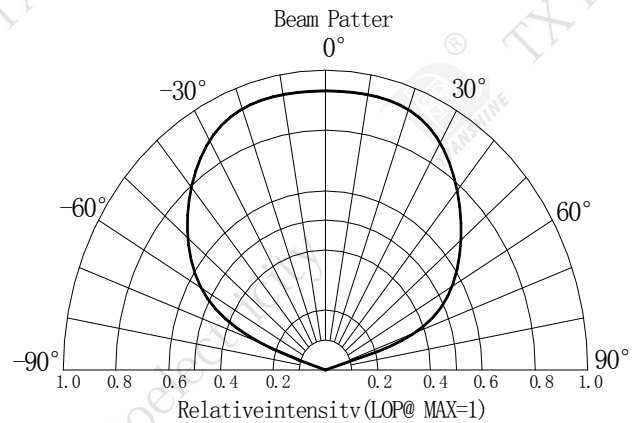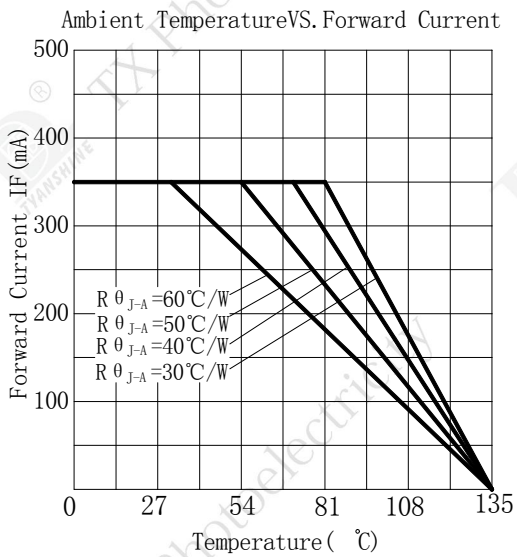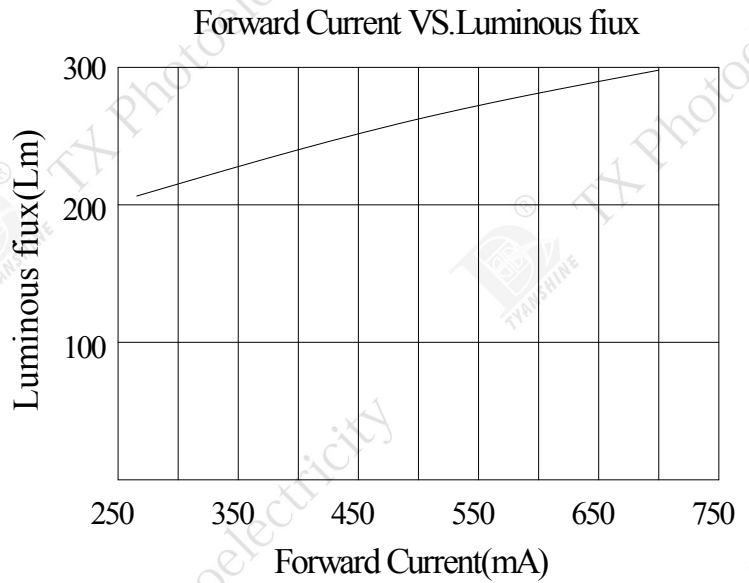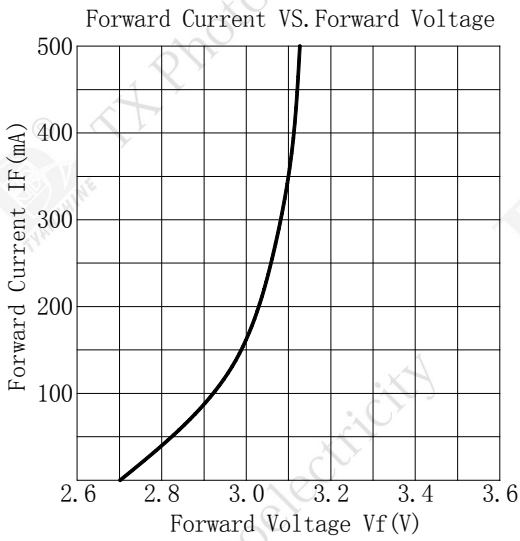

## PRECAUTION IN USE

### Storage


Recommended storage environment

Temperature: 5°C ~ 30°C (41oF ~ 86oF)

Humidity: 60% RH Max.

### Soldering

Use the conditions shown to the under figure.


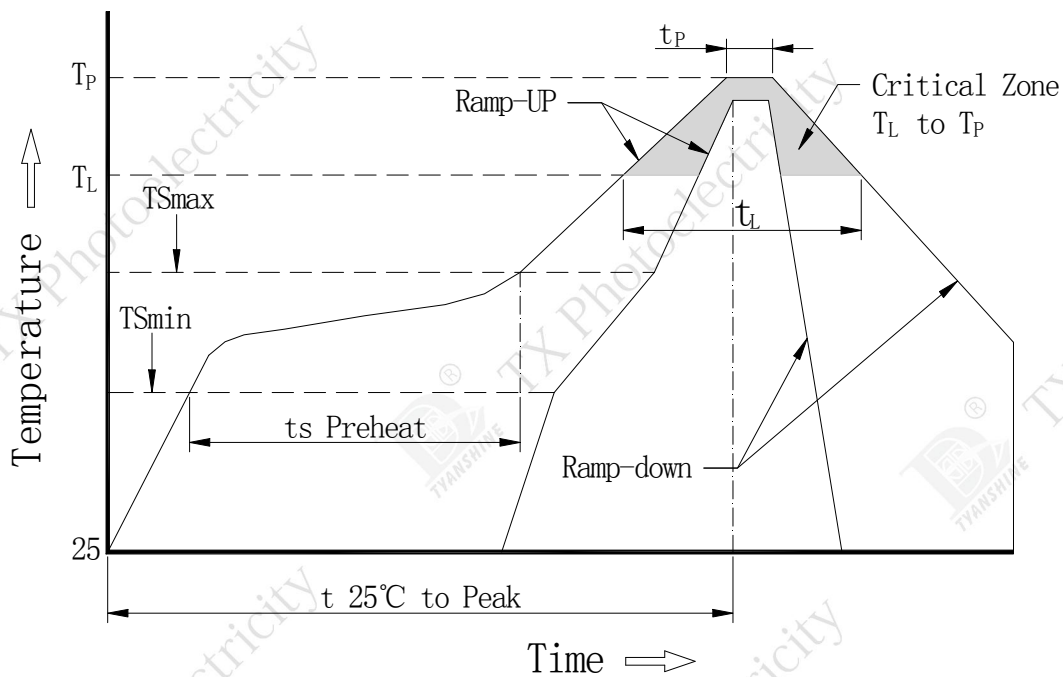


Profile Feature	Lead-Based Solder	Lead-Free Solder
Average Ramp-Up Rate ( $T_{Smax}$ to $T_P$ )	3°C/second max.	3°C/second max.
Preheat: Temperature Min ( $T_{Smin}$ )	100°C	150°C
Preheat: Temperature Max ( $T_{Smax}$ )	150°C	200°C
Preheat: Time ( $T_{Smin}$ to $T_{Smax}$ )	60-120 seconds	60-180 seconds
Time Maintained Above: Temperature ( $T_L$ )	183°C	217°C
Time Maintained Above: Time ( $T_L$ )	60-150 seconds	60-150 seconds
Peak/Classification Temperature ( $T_P$ )	215°C	260°C
Time Within 5°C of Actual Peak Temperature ( $T_P$ )	10-30 seconds	20-40 seconds
Ramp-Down Rate	6°C/second max.	6°C/second max.
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.

**Note:** All temperatures refer to topside of the package, measured on the package body surface.

## Dimensions for Cannulation and Packaging

Quantity: 1000PCS

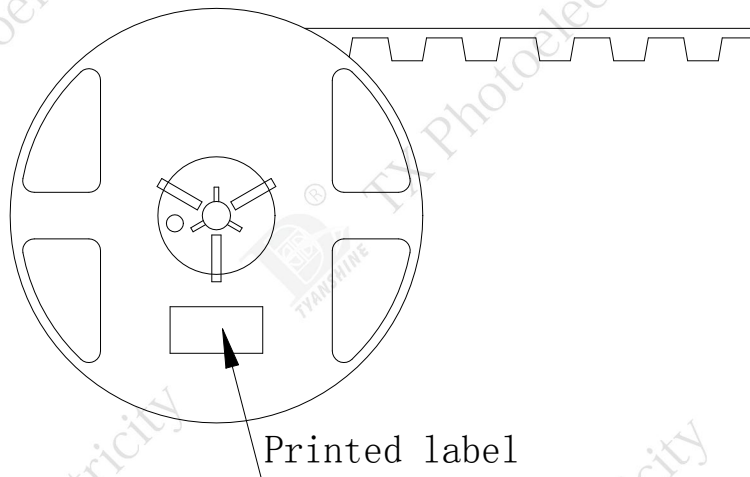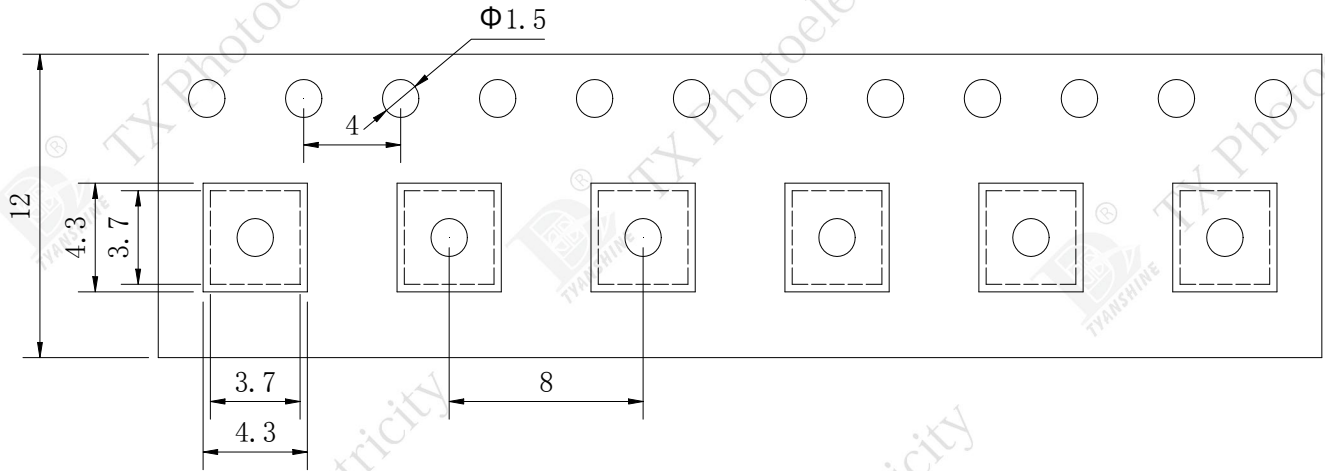

### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 2.0$  mm (0.08") unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.