

# TX-6060W250D180CUY-B03H95

## PRODUCT SPECIFICATION

### Features:

- ◆ Excellent transiting heat from LED chip operating under 7.0A.
- ◆ High luminous output.
- ◆ Encapsulated materials are environmentally certified and meet environmental requirements.

### Chip Material:

- ◆ GaN


### Emitting Color:

- ◆ White

### Applications:

- ◆ Stage lighting
- ◆ Architectural lighting
- ◆ Projection lighting
- ◆ Medical lighting

**Package Dimensions:**

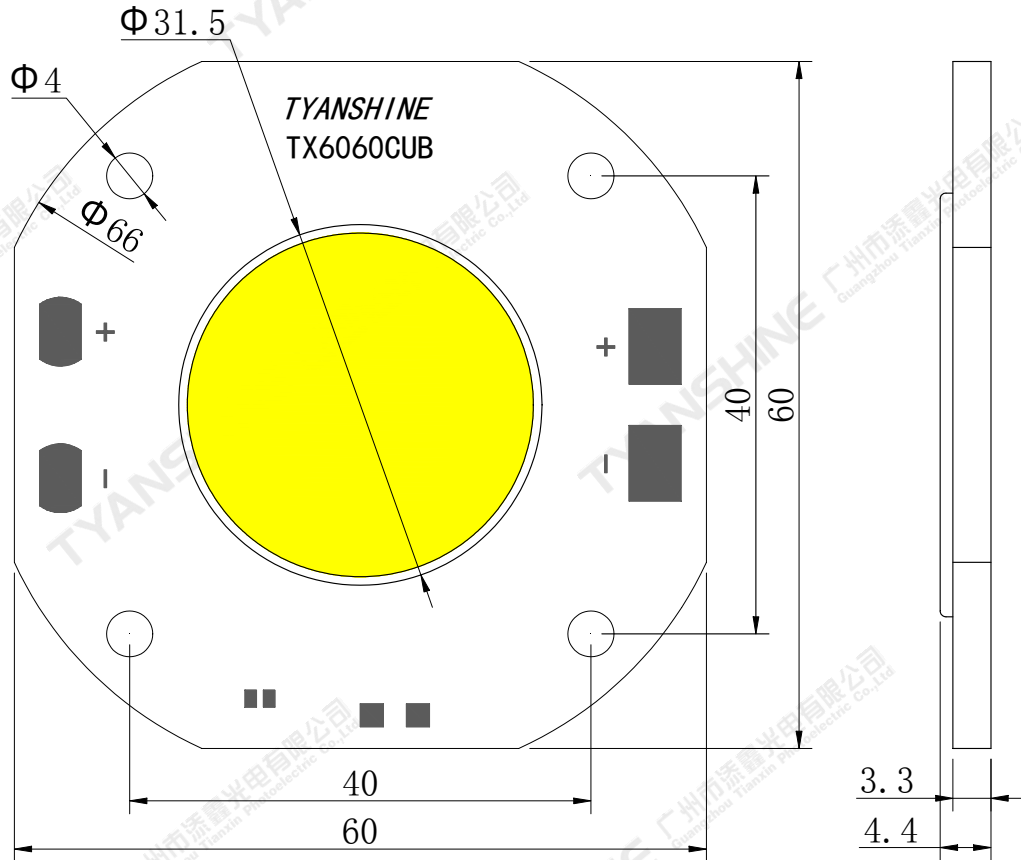

**Notes:**

1. All dimensions are in millimeters .
2. Tolerances unless otherwise mentioned are  $\pm 0.1$ mm .

Part No.	TX-6060W250D180CUY-B03H95	Spec No.	WKF-BF0283	Page	2 of 8
----------	---------------------------	----------	------------	------	--------

**Absolute Maximum Ratings**

Parameter	Symbol	Max Ratings	Unit
Forward Current	IF	7.0	A
Reverse Voltage	VR	Not designed for reverse operation	V
Power Dissipation	PD	283.5	W
Junction Temperature	Tj	150	°C
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Storage Temperature	Tstg	-40~70	°C
Operation Temperature	Topr	-30~100	

**Notes:**

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:  
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

**Electrical Optical Characteristics**



Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Luminous Flux	$\phi_v$	If=6.5A (Tc=25°C)	20000	22000	—	lm
		If=6.5A (Tc=85°C)	17500	19300	—	
Correlated Colour Temperature	CCT	If=6.5A (Tc=25°C)	5400	5600	5800	K
		If=6.5A (Tc=85°C)	5600	5800	6000	
Forward Voltage	Vf	If=6.5A (Tc=25°C)	36.5	38.5	40.5	V
		If=6.5A (Tc=85°C)	35	37	39	
Reverse Current	IR	—	—	—	—	$\mu$ A
Viewing Angle at 50% IV	$2\theta_{1/2}$	—	—	115	—	Deg
Thermal Resistance Junction to Case	R $\theta_{J-C}$	—	—	0.05	—	K/W
Temperature Coefficient of Voltage	V $\Delta$ F/T	If=6.5A	—	-21.7	—	mV/°C
Color Rendering Index	Ra	If=6.5A (Tc=85°C)	95	97	—	—
	R9		90	—	—	
Thermistor(NTC)	Rt25	—	—	10	—	K $\Omega$



**Notes:**

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- The dominant wavelength ( $\lambda_d$ ) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- Luminous flux measurement tolerance:  $\pm 15\%$ .
- Forward voltage measurement tolerance:  $\pm 0.15V$ .


# Typical Electrical/Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

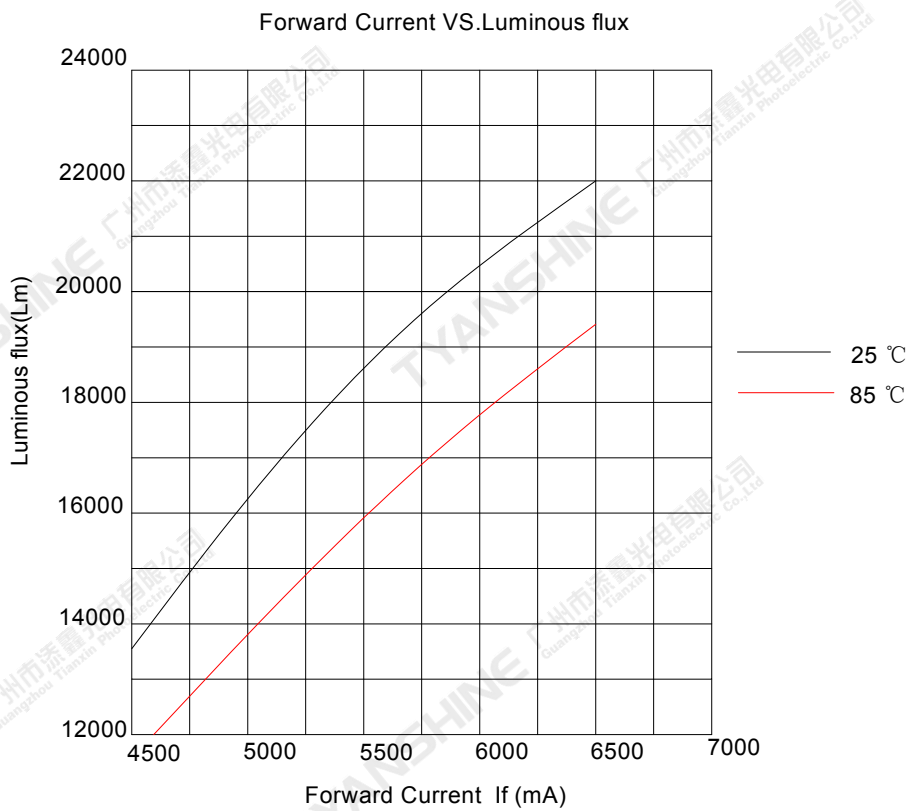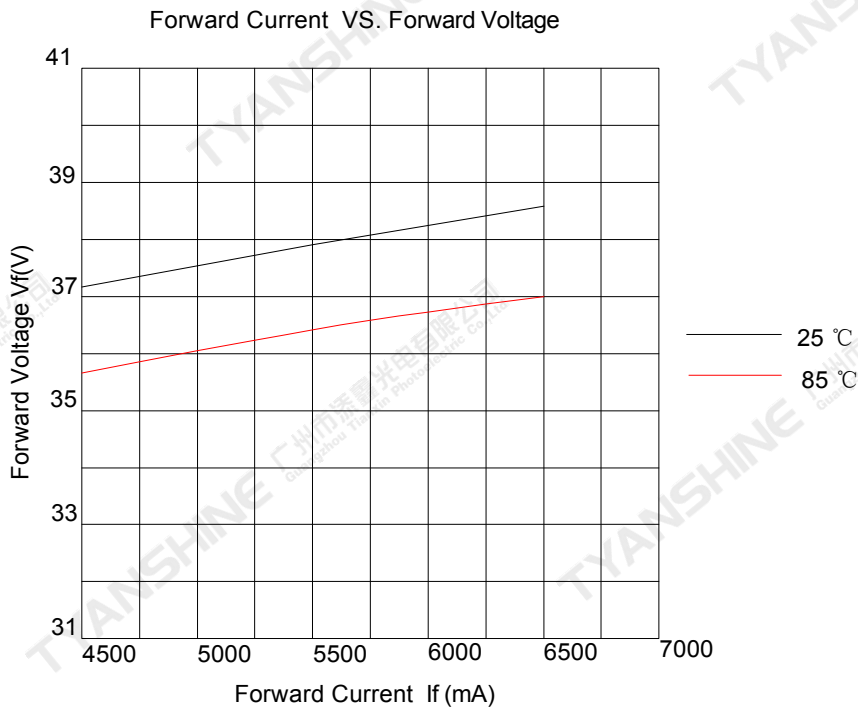


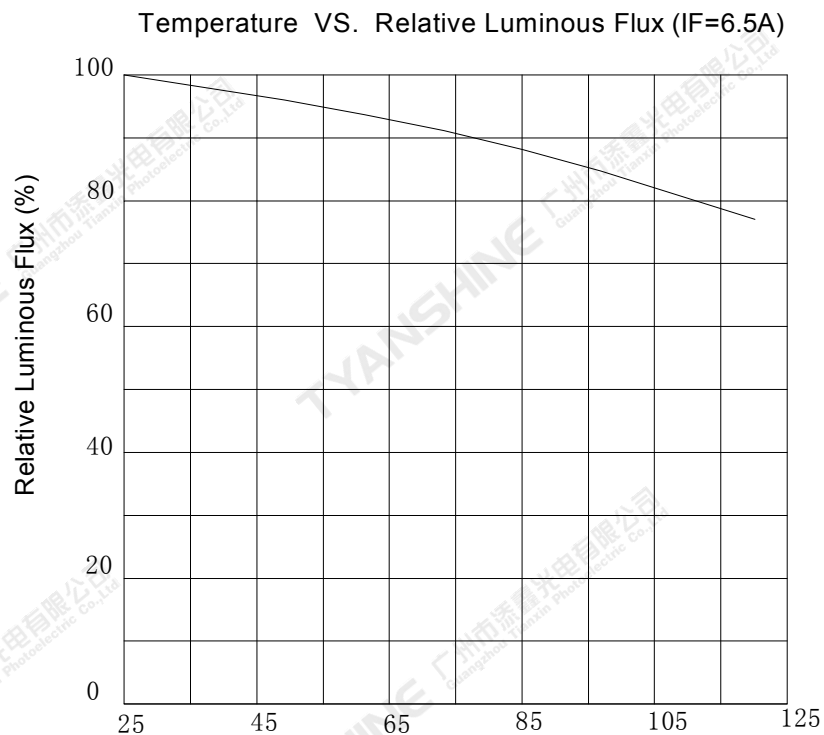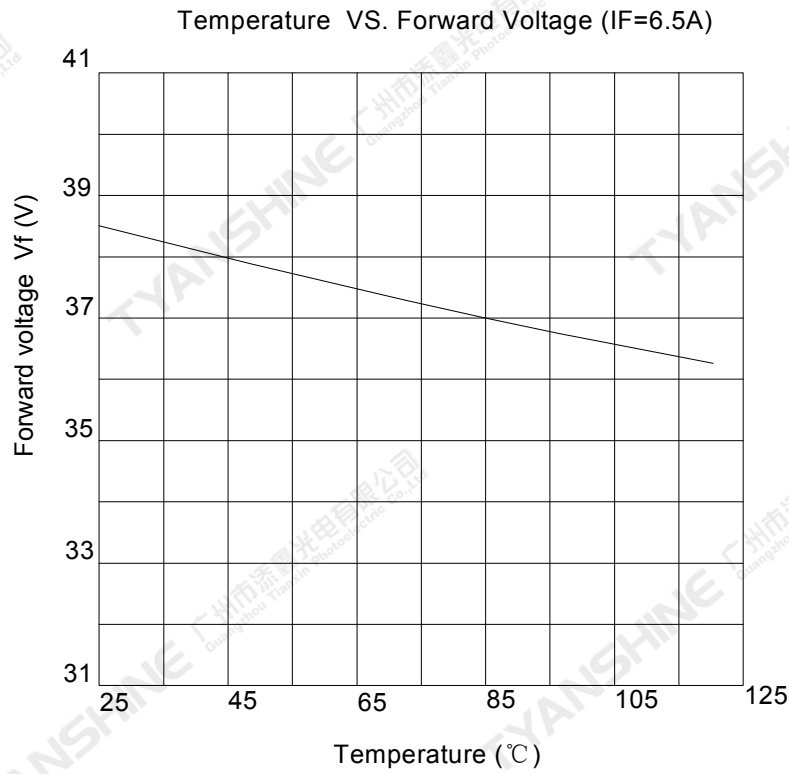

Relative Spectral Distribution

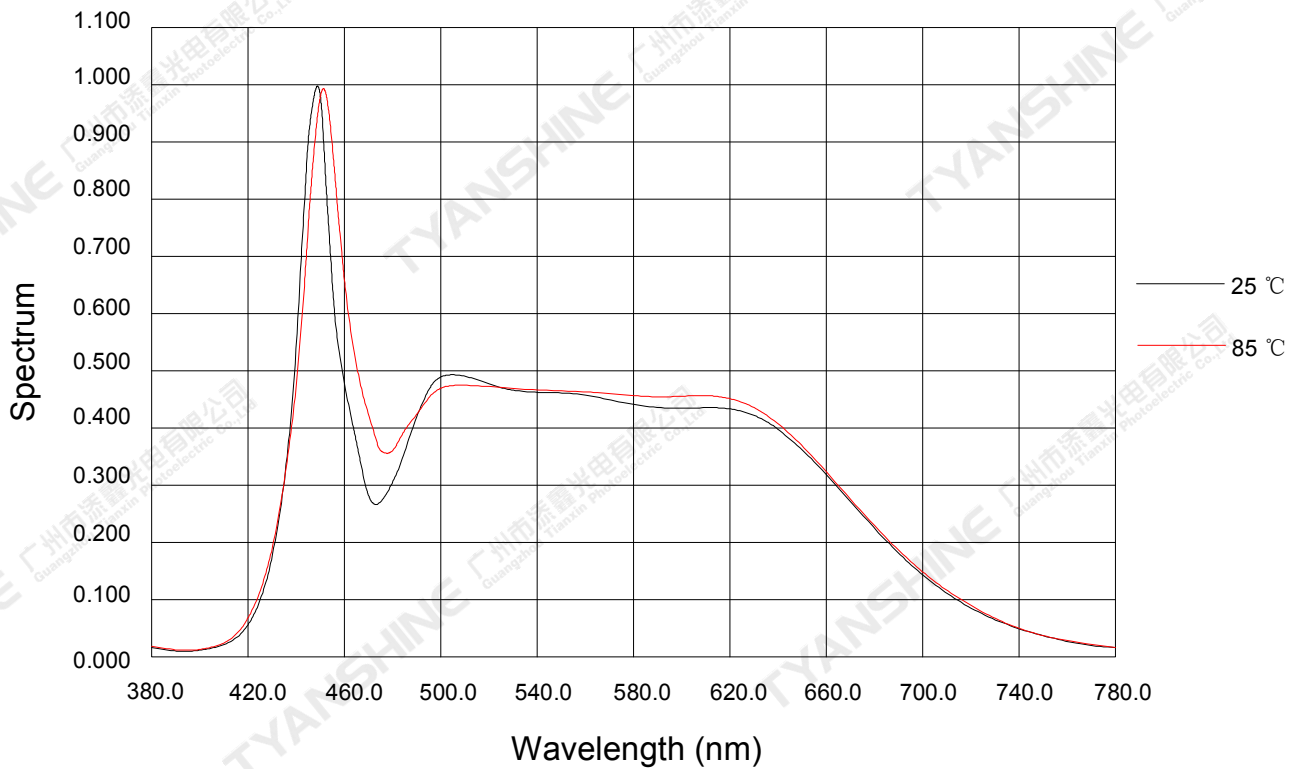

Beam Pattern

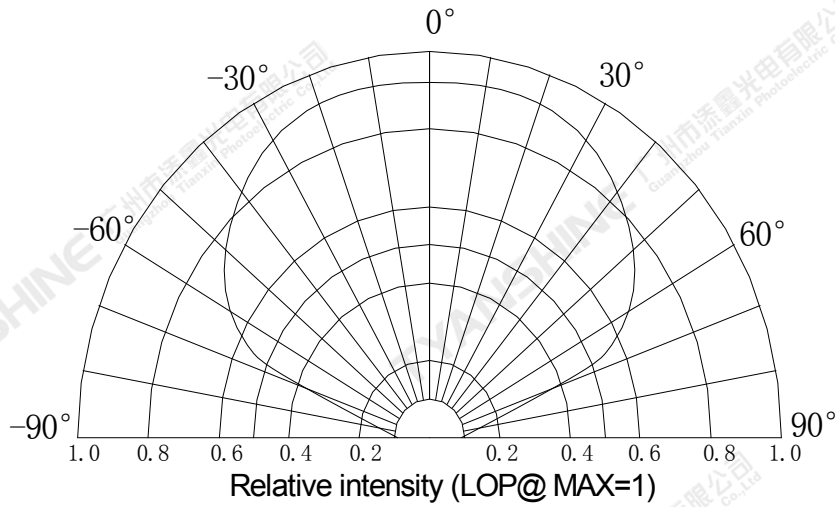


**Notes:**

1.  $2\theta_{1/2}$  is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is  $\pm 5^\circ$ .

Part No.	TX-6060W250D180CUY-B03H95	Spec No.	WKF-BF0283	Page	7 of 8
----------	---------------------------	----------	------------	------	--------

**Dimensions For Cannulation And Packaging**

**Quantity: 4 PCS**

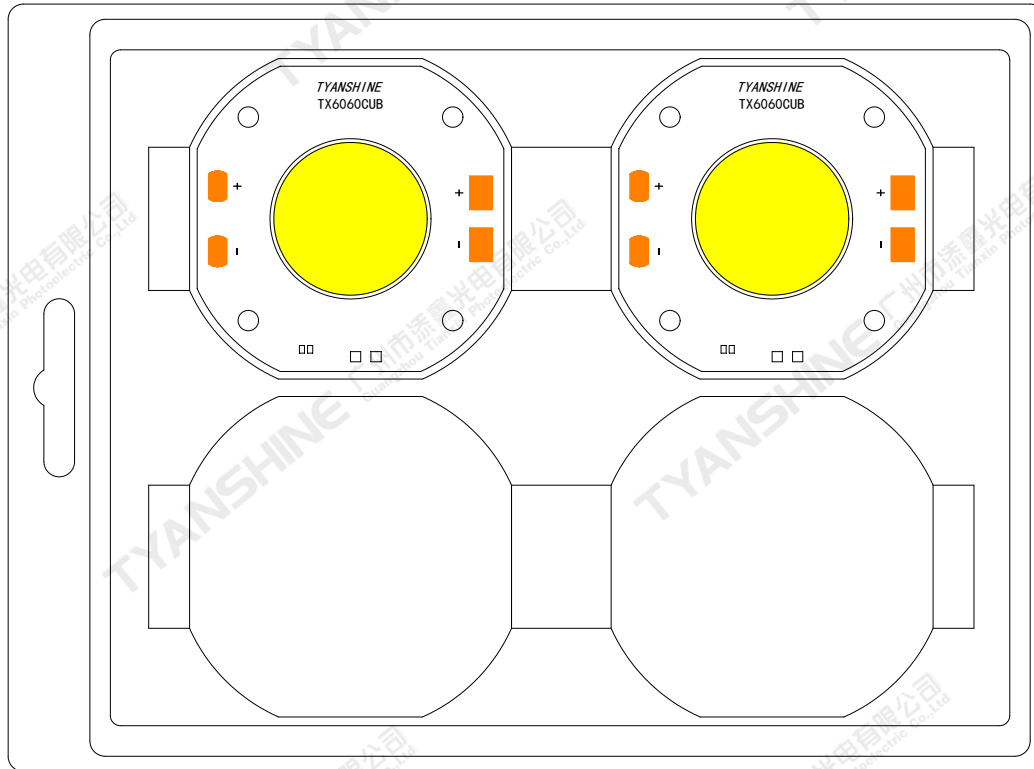

**Notes:**

1. All dimensions are in millimeters.
2. Tolerances are  $\pm 2.0$  mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.

Part No.	TX-6060W250D180CUY-B03H95	Spec No.	WKF-BF0283	Page	8 of 8
----------	---------------------------	----------	------------	------	--------