

# TX-6060W500D180CUY-C01H95

## PRODUCT SPECIFICATION (R&D version)

### Features:

- ◆ Excellent transiting heat from LED chip operating under 11.5A.
- ◆ High luminous output.
- ◆ Encapsulated materials are environmentally certified and meet environmental requirements.

### Chip Material:

- ◆ GaN

### Emitting Color:


- ◆ Warm white

### Applications:

- ◆ Stage lighting
- ◆ Architectural lighting
- ◆ Projection lighting
- ◆ Medical lighting

Part No.	TX-6060W500D180CUY-C01H95	Spec No.	(R&D version)	Page	1 of 8
----------	---------------------------	----------	---------------	------	--------

**Package Dimensions:**

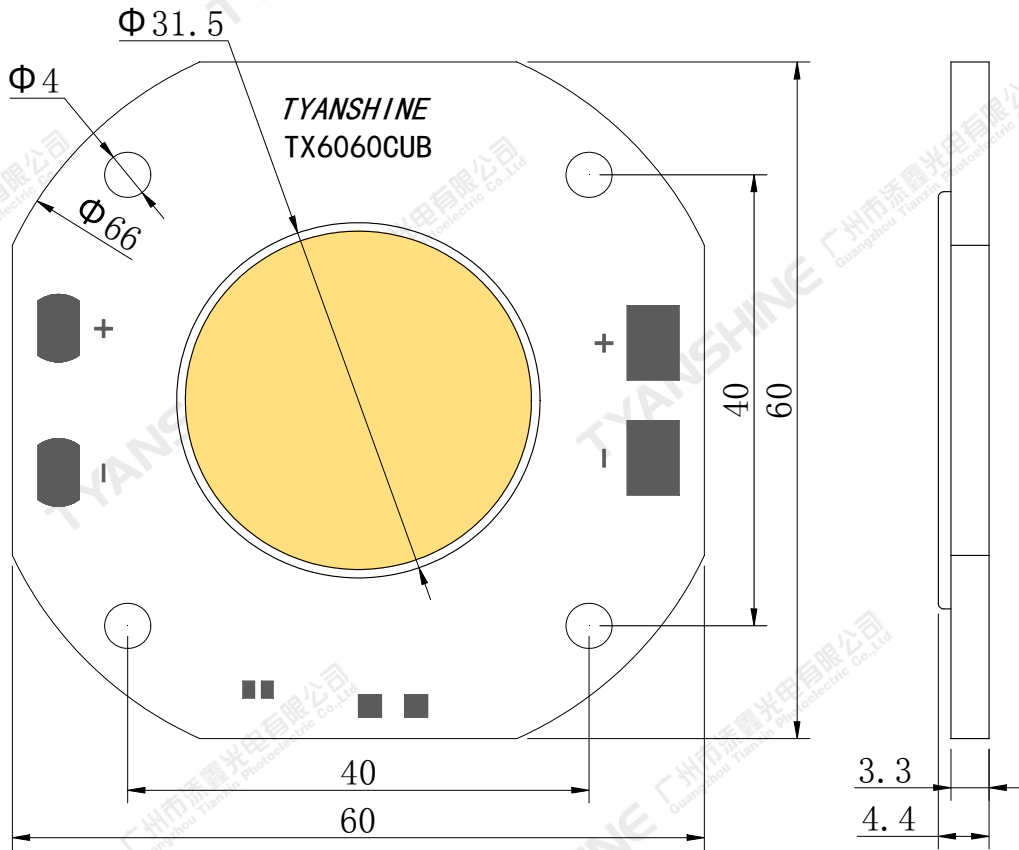

**Notes:**

1. All dimensions are in millimeters .
2. Tolerances unless otherwise mentioned are  $\pm 0.1$ mm .

**Absolute Maximum Ratings**

Parameter	Symbol	Max Ratings	Unit
Forward Current	IF	11.5	A
Reverse Voltage	V <sub>R</sub>	Not designed for reverse operation	V
Power Dissipation	P <sub>D</sub>	540.5	W
Junction Temperature	T <sub>j</sub>	150	°C
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Storage Temperature	T <sub>stg</sub>	-40~70	°C
Operation Temperature	T <sub>opr</sub>	-30~100	

**Notes:**

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:  
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

**Electrical Optical Characteristics**



Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Luminous Flux	$\phi_v$	If=11A (Tc=25°C)	33000	37000	—	lm
		If=11A (Tc=85°C)	28000	31500	—	
Correlated Colour Temperature	CCT	If=11A (Tc=25°C)	3000	3125	3250	K
		If=11A (Tc=85°C)	2900	2950	3080	
Forward Voltage	Vf	If=11A (Tc=25°C)	43.0	45.0	47.0	V
		If=11A (Tc=85°C)	42.0	44.0	46.0	
Reverse Current	IR	—	—	—	—	$\mu$ A
Viewing Angle at 50% IV	2 $\theta_{1/2}$	—	—	115	—	Deg
Thermal Resistance Junction to Case	R $\theta_{J-C}$	—	—	0.04	—	K/W
Temperature Coefficient of Voltage	V $\Delta$ F/T	If=11A	—	-16.7	—	mV/°C
Color Rendering Index	Ra	If=11A (Tc=85°C)	95	97	—	—
Thermistor(NTC)	Rt25	—	—	10	—	K $\Omega$

**Notes:**


- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.The dominant wavelength ( $\lambda_d$ ) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- 4.Luminous flux measurement tolerance:±15%.
- 5.Forward voltage measurement tolerance:±0.15V.

# Typical Electrical/Optical Characteristics Curves


(25°C Ambient Temperature Unless Otherwise Noted)

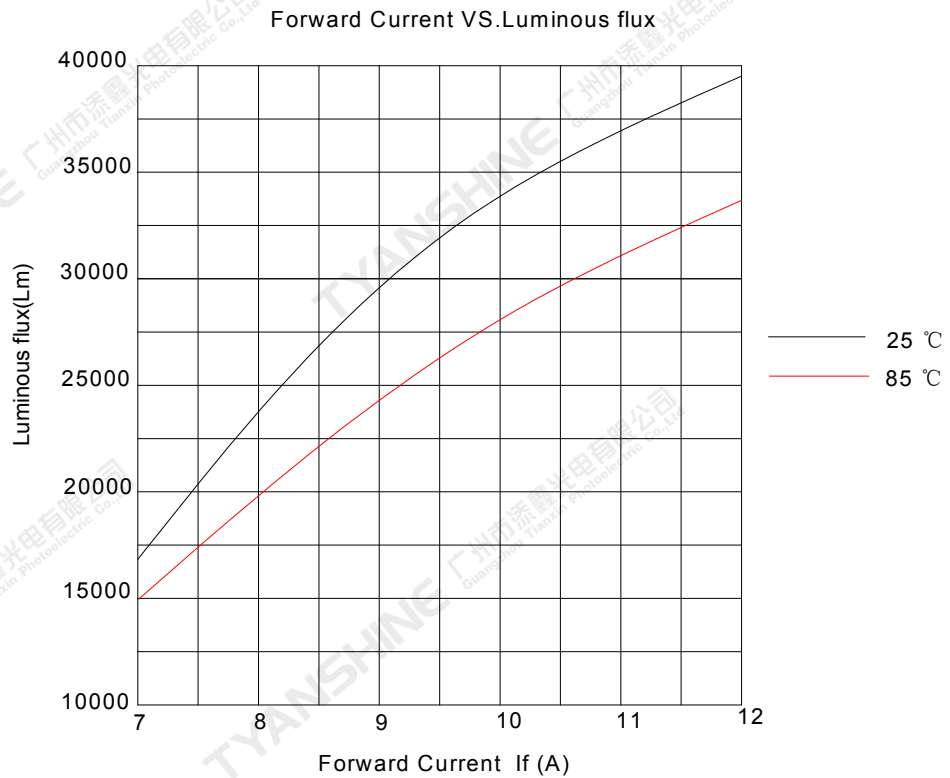
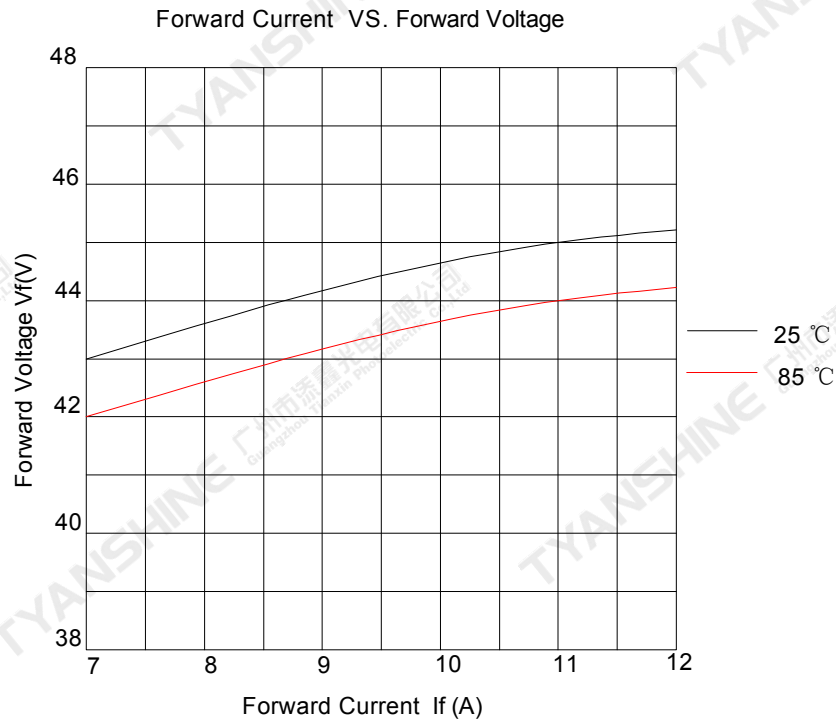


Temperature VS. Forward Voltage (IF=11A)

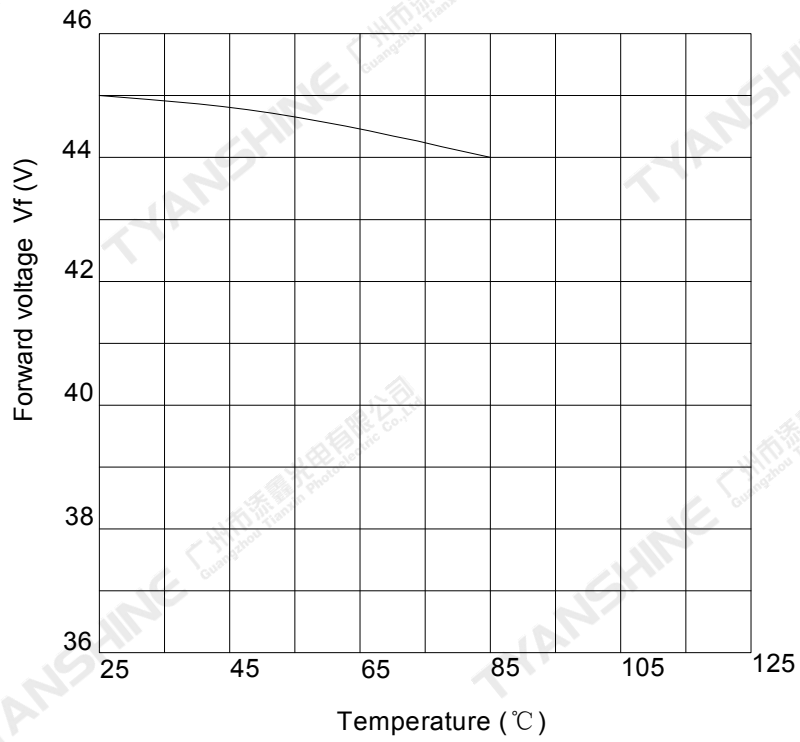

Temperature VS. Relative Luminous Flux (IF=11A)

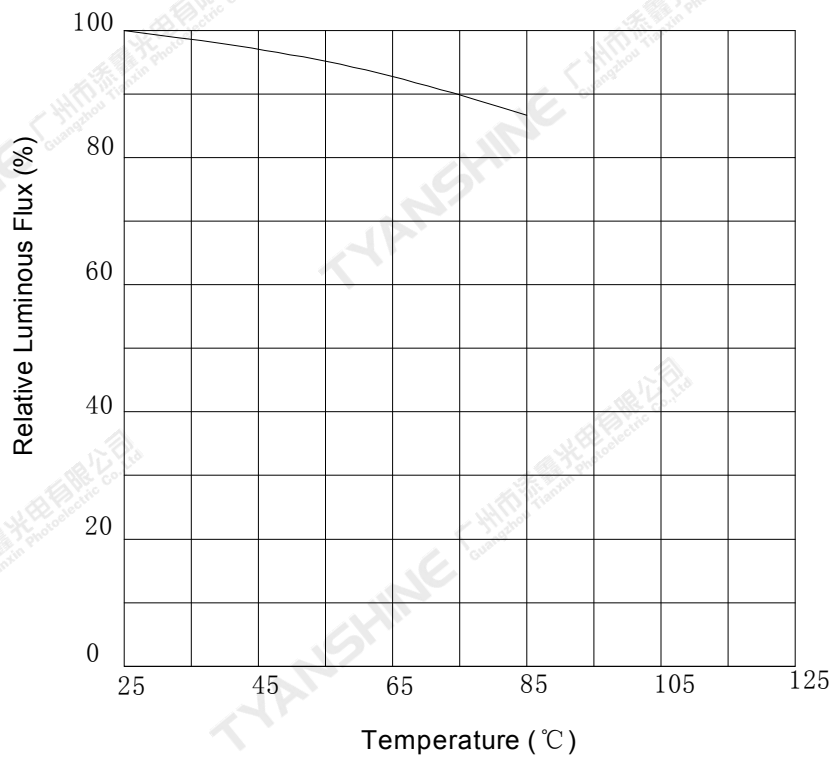

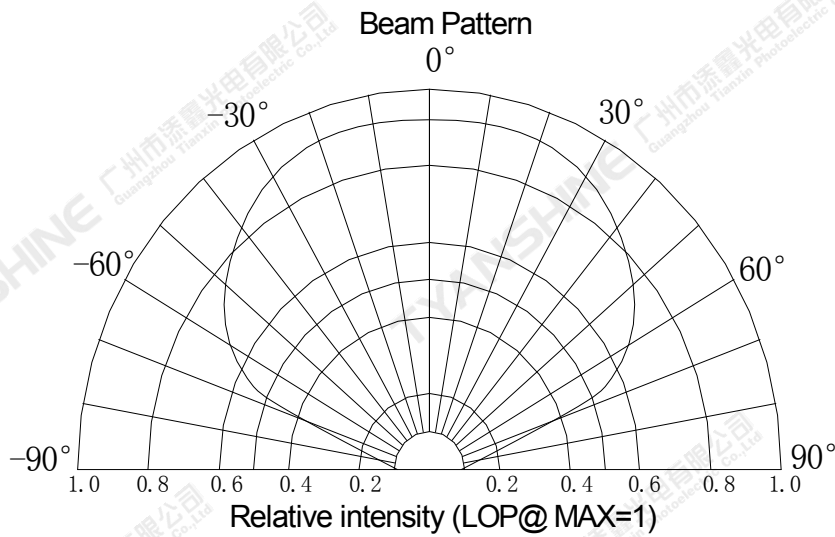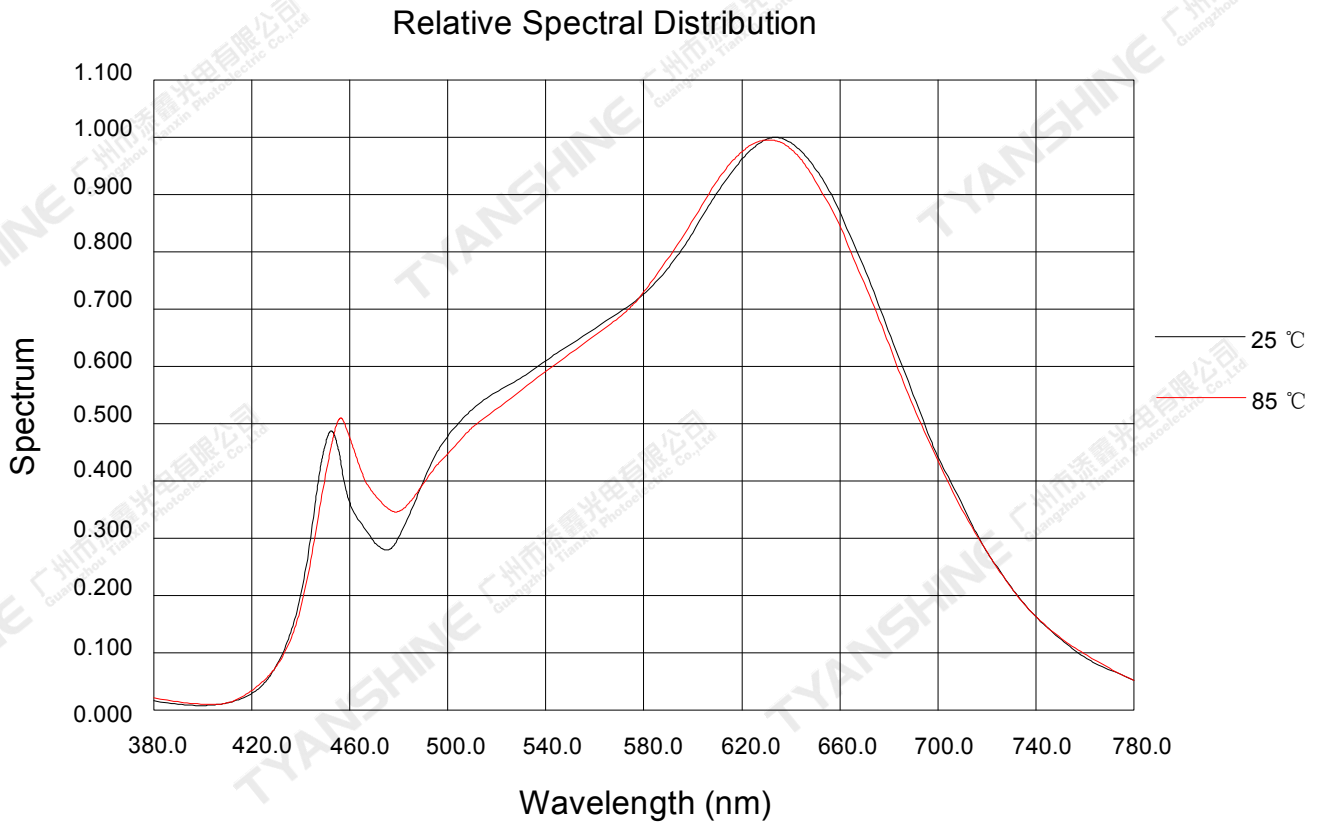


**Notes:**

1.  $2\theta$  1/2 is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is  $\pm 5^\circ$ .

**Dimensions For Cannulation And Packaging**

**Quantity: 4 PCS**

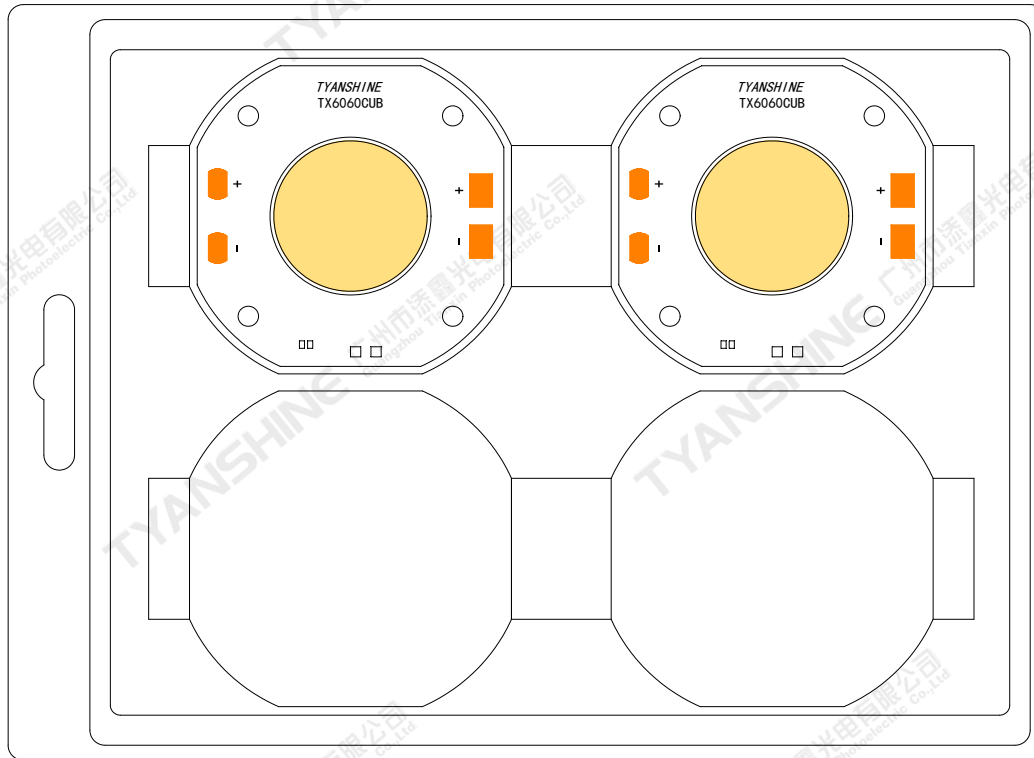

**Notes:**

1. All dimensions are in millimeters.
2. Tolerances are  $\pm 2.0$  mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.

Part No.	TX-6060W500D180CUY-C01H95	Spec No.	(R&D version)	Page	8 of 8
----------	---------------------------	----------	---------------	------	--------