

TX-7070W36FC120-NUFEZW-B03D

PRODUCT SPECIFICATION

Features:

- ◆Excellent transiting heat from LED chip operating under 1600mA*2.
- ◆Ceramic eutectic package allows it to have minimal internal stress and excellent thermal path.
- ◆Flip chip coated with package, the output of lumen is stable.
- ◆High luminous output.
- ◆Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆GaN

Emitting Color:


- ◆white

Applications:

- ◆Automobile lighting

Part No.	TX-7070W36FC120-NUFEZW-B03D	Spec No.	WKF-BE0847	Page	1 of 9
----------	-----------------------------	----------	------------	------	--------

Package Dimensions:

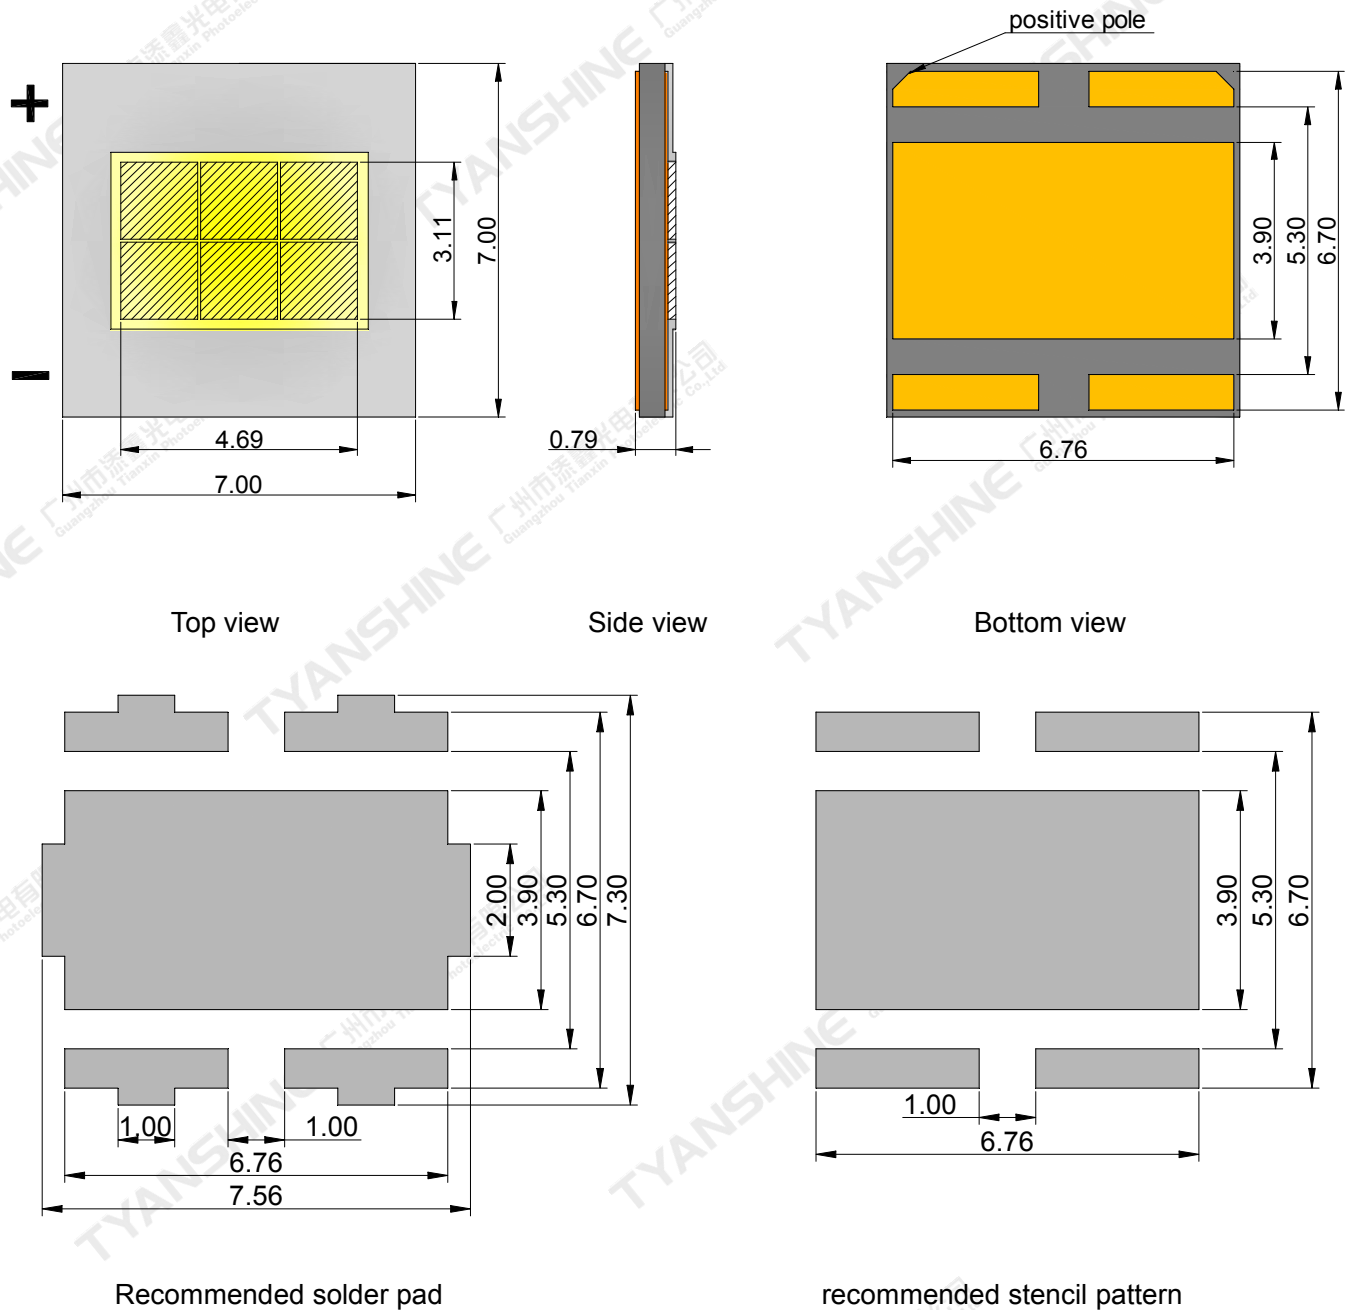

Notes:

- 1.All dimensions are in millimeters .
- 2.Tolerances unless otherwise mentioned are $\pm 0.1\text{mm}$.

Absolute Maximum Ratings (Tc=25℃)

Parameter	Symbol	Ratings	Unit
Forward Current	IF	1600*2	mA
Reverse Voltage	VR	Not designed for reverse operation	V
Power Dissipation	PD	36	W
Junction Temperature	Tj	150	℃
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Storage Temperature	Tstg	-40~+70	℃
Operation Temperature	Topr	-30~+125	

Notes:

- 1.Specifications are subject to change without notice.
- 2.The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- 3.Precautions for ESD:
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Part No.	TX-7070W36FC120-NUFEZW-B03D	Spec No.	WKF-BE0847	Page	3 of 9
----------	-----------------------------	----------	------------	------	--------

Electrical Optical Characteristics (Tc=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
Luminous Flux	ϕ_v	If=1500mA*2	2900	3280	3600	lm
Forward Voltage	V_f		9.2	9.6	10.0	V
Viewing Angle at 50 % IV	$2\theta_{1/2}$		—	120	—	Deg
Correlated Colour Temperature	CCT	If=1000mA*2	4300	5500	6000	K
Reverse Current	I_R	$V_R=5V$	—	—	—	μA
Thermal Resistance Junction to Case	$R\theta_{J-C}$	—	—	0.3	—	K/W
Temperature Coefficient of Voltage	$V\Delta F/T$	If=1500mA*2	—	-10	—	mV/°C

White light Color coordinate filing (IF=1.0A)

Region	CCT Range		X1	Y1	X2	Y2	X3	Y3	X4	Y4
	Min	Max								
J11	4300	4600	0.3747	0.4033	0.3601	0.3813	0.3637	0.4054	0.3800	0.4293
I11	4600	5000	0.3599	0.3803	0.3458	0.3589	0.3471	0.3796	0.3621	0.4033
H1	5000	5300	0.3464	0.3687	0.3375	0.3586	0.3379	0.3741	0.3471	0.3832
G12	5300	5700	0.3373	0.3545	0.3289	0.3451	0.3274	0.3598	0.3379	0.3708
G10	5700	6000	0.3278	0.3406	0.3219	0.3345	0.3210	0.3465	0.3275	0.3537

Notes:


- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- 4.Luminous flux measurement tolerance:±15%.
- 5.Forward voltage measurement tolerance:±0.15V.

Part No.	TX-7070W36FC120-NUFEZW-B03D	Spec No.	WKF-BE0847	Page	4 of 9
----------	-----------------------------	----------	------------	------	--------


Typical Electrical/Optical Characteristics Curves



(25°C Ambient Temperature Unless Otherwise Noted)



Forward Current VS. Forward Voltage

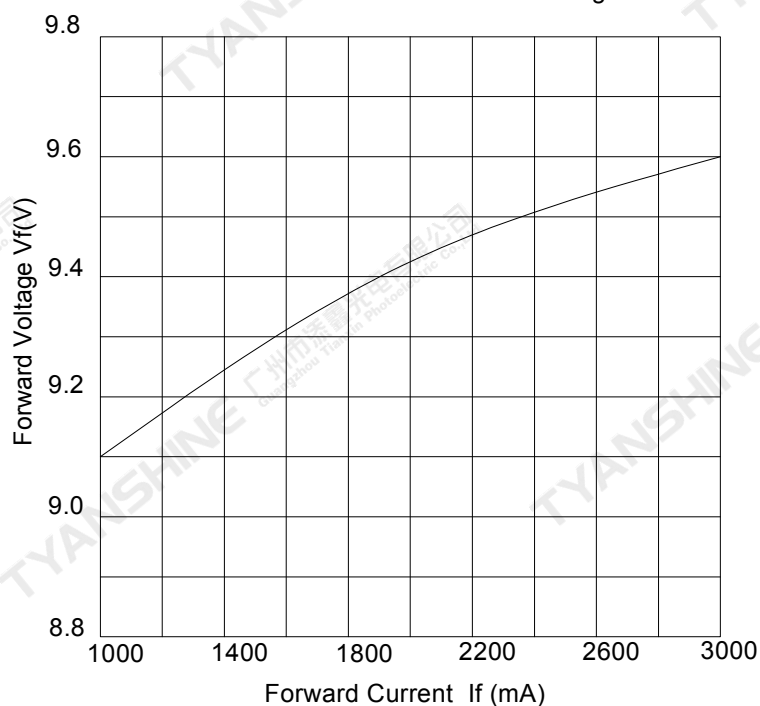

Forward Current VS. Luminous flux

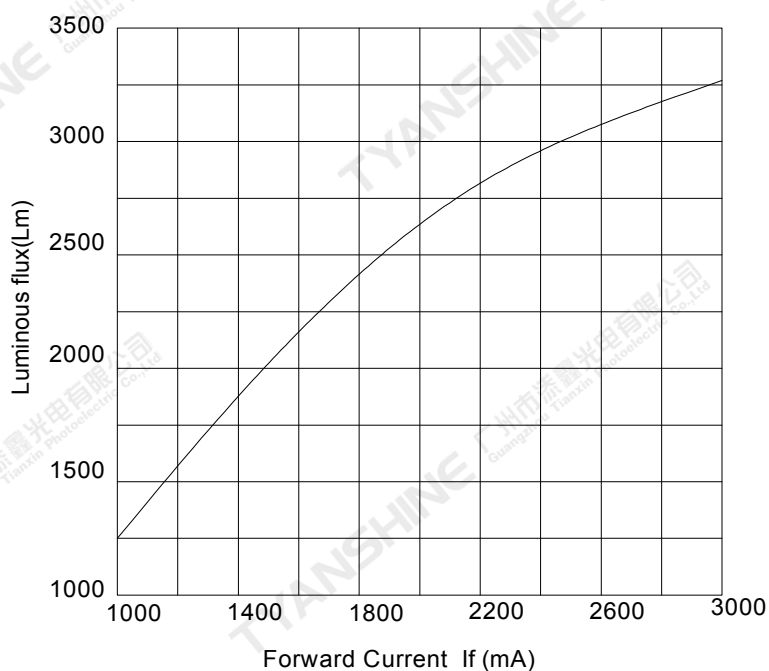

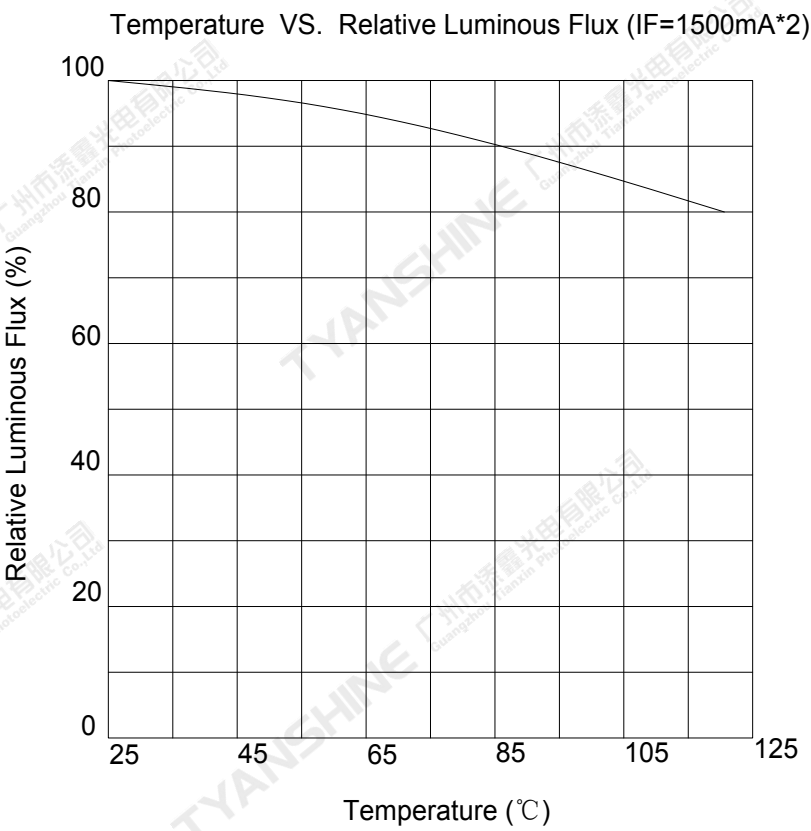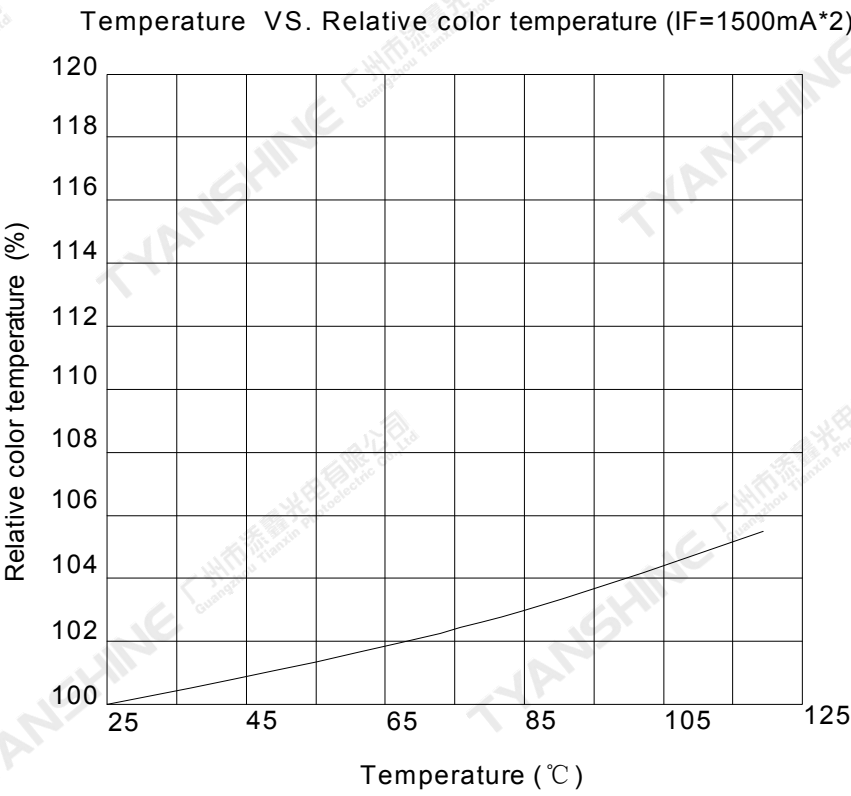

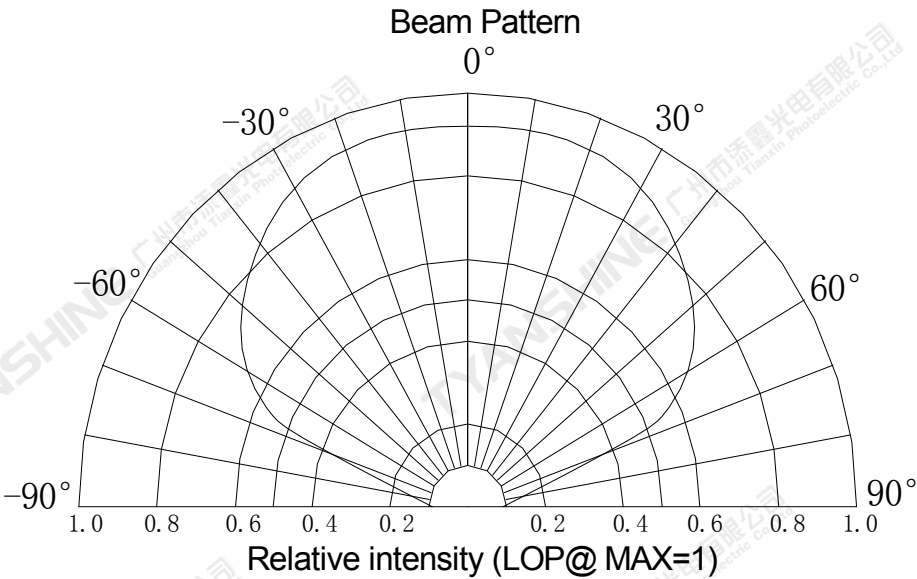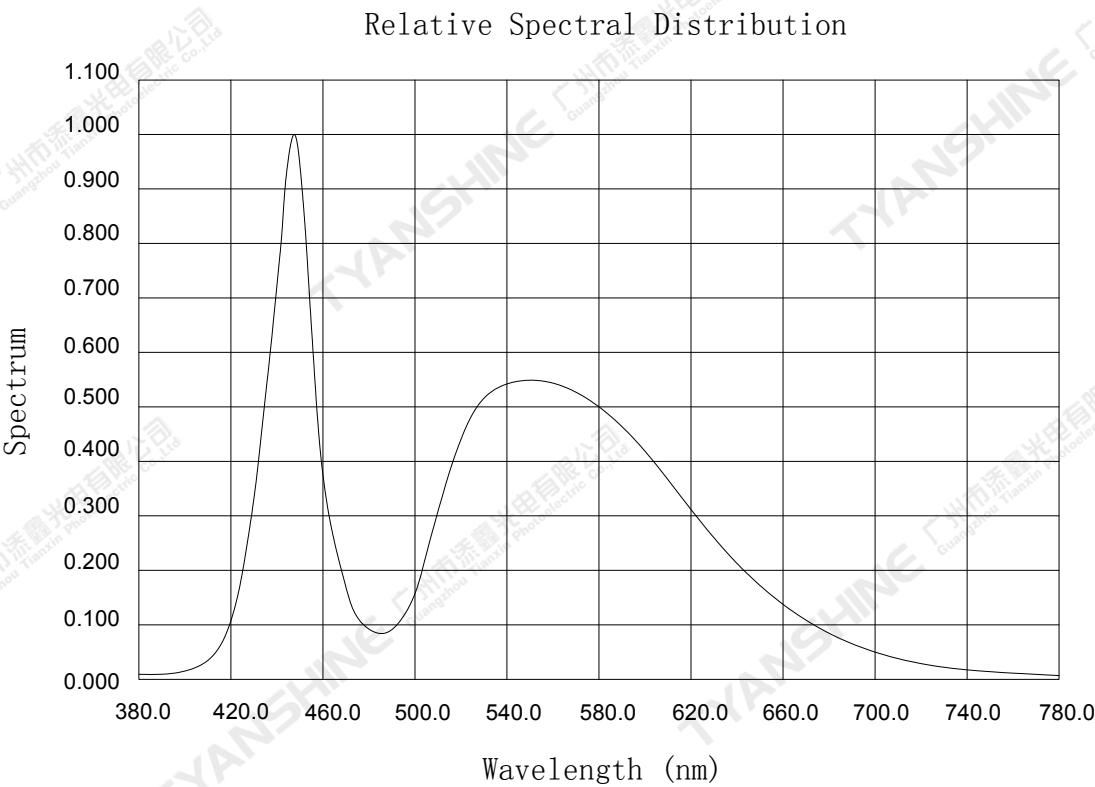

Notes:

1. 2θ 1/2 is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is ± 5°.

Part No.	TX-7070W36FC120-NUFEZW-B03D	Spec No.	WKF-BE0847	Page	7 of 9
----------	-----------------------------	----------	------------	------	--------


Usage Precautions

Storage Environment Condition

Temperature: 5°C ~ 30°C (41°F ~ 86°F)

Humidity: 60% RH Max.

Soldering Condition

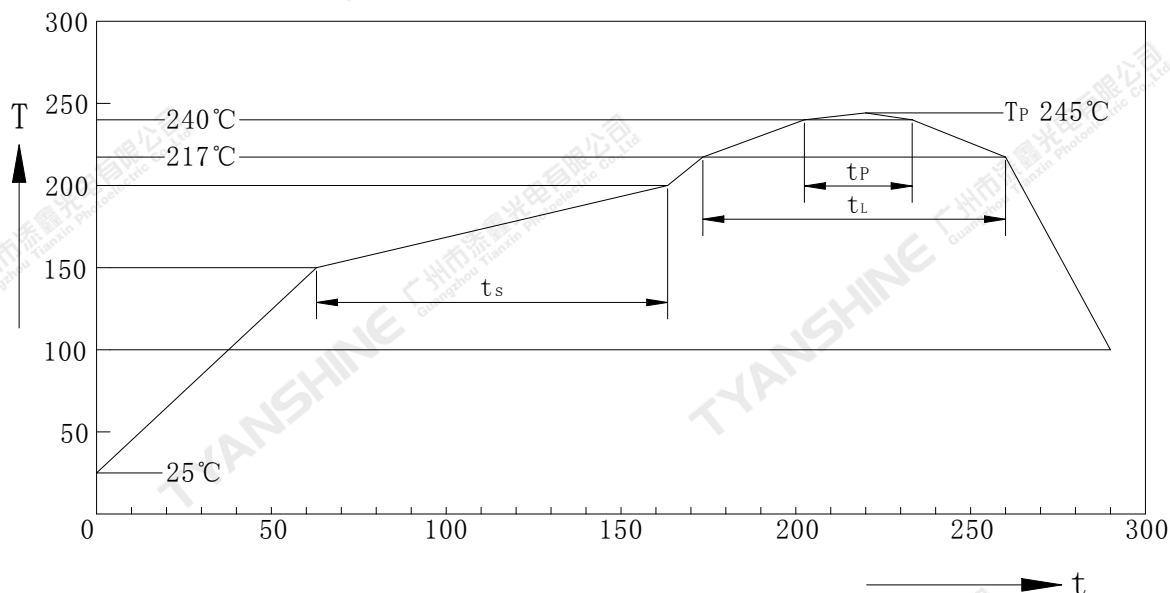


Profil-Charakteristik Profile Feature	Symbol	Pb-Free(SnAgCu)Assembly			Einheit Unit
		Minimum	Recommendation	Maximum	
Ramp-up Rate to Preheat 25°C to 150°C	-	-	2	3	K/s
Time ts T _{Smin} to T _{Smax}	ts	60	100	120	s
Ramp-up Rate to Peak T _{Smax} to Tp	-	-	2	3	K/s
Liquidus Temperature	T _L	217			°C
Time above Liquidus temperature	t _L	-	80	100	s
Peak Temperature	T _P	-	245	260	°C
Time within 5°C of the specified peak temperature Tp-5 K	tp	10	20	30	s
Ramp-down Rate Tp to 100°C	-	-	3	6	K/s
Time 25°C to Tp	-	-	-	480	-

Note:

All temperatures refer to topside of the package, measured on the package body surface.

Dimensions For Cannulation And Packaging

Quantity: 1000PCS

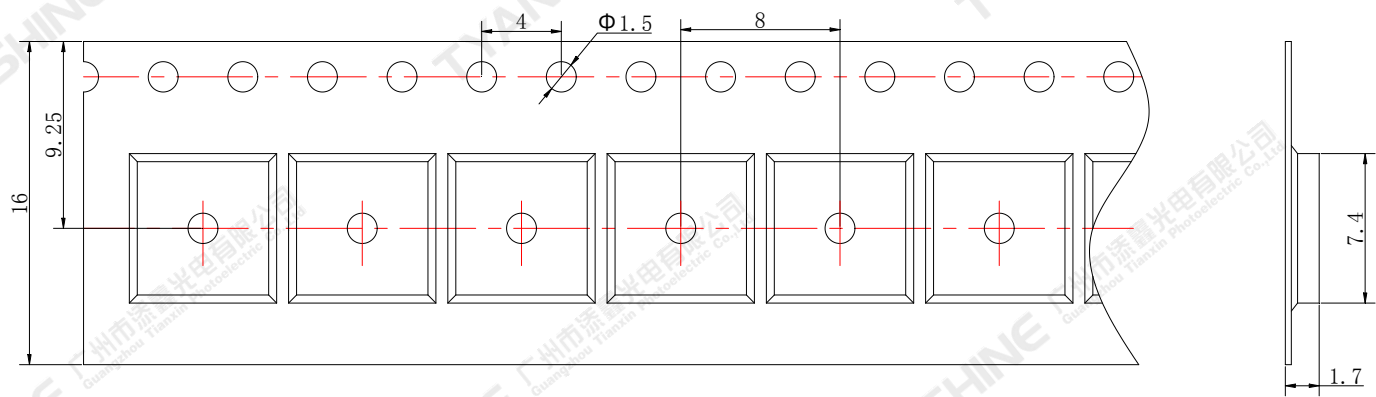

Notes:

1. All dimensions are in millimeters.
2. Tolerances are ± 2.0 mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.