

# TX-3570W16FC120-NUFEZW-B04DT

## PRODUCT SPECIFICATION

### Features:

- ◆Excellent transiting heat from LED chip operating under 2200mA.
- ◆Ceramic eutectic package allows it to have minimal internal stress and excellent thermal path.
- ◆Flip chip coated with package, the output of lumen is stable.
- ◆High luminous output.
- ◆Encapsulated materials are environmentally certified and meet environmental requirements.

### Chip Material:

- ◆GaN

### Lens Color:



- ◆Cold white

### Applications:


- ◆Automobile lighting

|          |                              |          |            |      |        |
|----------|------------------------------|----------|------------|------|--------|
| Part No. | TX-3570W16FC120-NUFEZW-B04DT | Spec No. | WKF-EE0003 | Page | 1 of 9 |
|----------|------------------------------|----------|------------|------|--------|

## Package Dimensions:

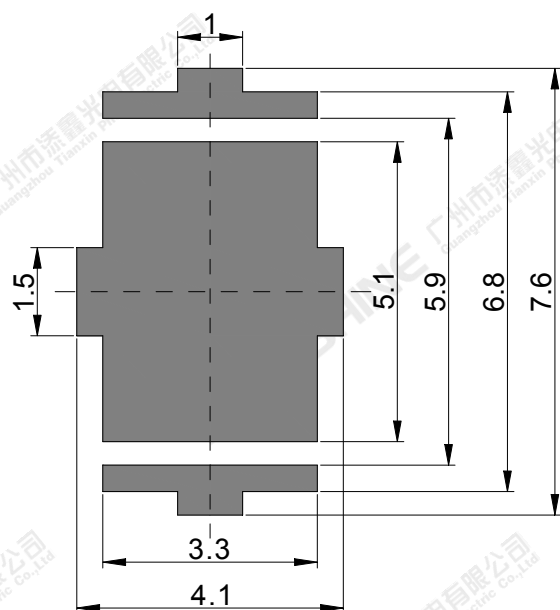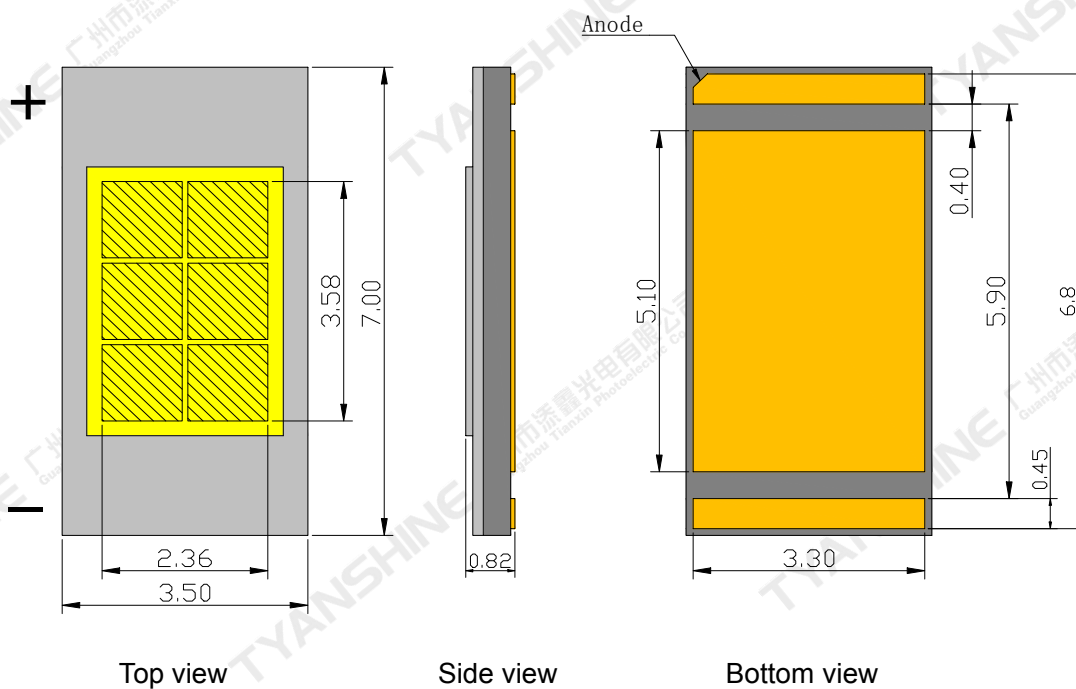

Recommended solder pad

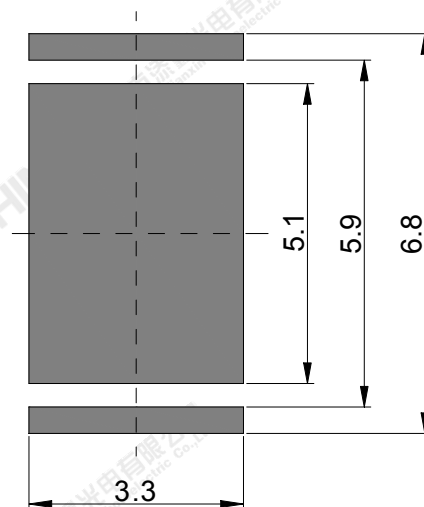

recommended stencil pattern

## Notes:

- 1.All dimensions are in millimeters .
- 2.Tolerances unless otherwise mentioned are  $\pm 0.1\text{mm}$  .

## Absolute Maximum Ratings (Tc=25℃)

| Parameter                               | Symbol | Ratings                            | Unit |
|-----------------------------------------|--------|------------------------------------|------|
| Forward Current                         | IF     | 2200                               | mA   |
| Reverse Voltage                         | VR     | Not designed for reverse operation | V    |
| Power Dissipation                       | PD     | 20                                 | W    |
| Junction Temperature                    | Tj     | 150                                | ℃    |
| Electrostatic Discharge Threshold (ESD) | ESD    | 2000                               | V    |
| Storage Temperature                     | Tstg   | -40~+70                            | ℃    |
| Operation Temperature                   | Topr   | -30~+125                           |      |

**Notes:**

- 1.Specifications are subject to change without notice.
- 2.The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- 3.Precautions for ESD:  
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

## Electrical Optical Characteristics (Tc=25°C)

| Parameter                           | Symbol           | Condition | Min. | Typ. | Max. | Units   |
|-------------------------------------|------------------|-----------|------|------|------|---------|
| Luminous Flux                       | $\phi_v$         | If=1700mA | 1850 | 2000 | 2300 | lm      |
| Forward Voltage                     | $V_f$            |           | 8.9  | 9.3  | 9.7  | V       |
| Viewing Angle at 50 % IV            | $2\theta_{1/2}$  |           | —    | 120  | —    | Deg     |
| Reverse Current                     | $I_R$            | $V_R=5V$  | —    | —    | —    | $\mu A$ |
| Correlated Colour Temperature       | CCT              | If=1000mA | 5500 | 6250 | 6900 | K       |
| Thermal Resistance Junction to Case | $R_{\theta J-C}$ | —         | —    | 0.55 | —    | K/W     |
| Temperature Coefficient of Voltage  | $V_{\Delta F/T}$ |           | —    | -6   | —    | mV/°C   |

## White light Color coordinate filing (IF=1.0A )

| Region | CCT Range |       | X1     | Y1     | X2     | Y2     | X3     | Y3     | X4     | Y4     |
|--------|-----------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
|        | Min       | Max   |        |        |        |        |        |        |        |        |
| G12    | 5500K     | 5700K | 0.3322 | 0.3612 | 0.3274 | 0.3516 | 0.3270 | 0.3672 | 0.3323 | 0.3763 |
| G10    | 5700K     | 6000K | 0.3275 | 0.3506 | 0.3216 | 0.3374 | 0.3205 | 0.3523 | 0.3270 | 0.3662 |
| F01    | 6000K     | 6500K | 0.3216 | 0.3364 | 0.3141 | 0.3196 | 0.3123 | 0.3336 | 0.3206 | 0.3513 |
| E11    | 6500K     | 6900K | 0.3143 | 0.3185 | 0.3118 | 0.3129 | 0.3096 | 0.3265 | 0.3124 | 0.3326 |

## Notes:


- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.The dominant wavelength ( $\lambda_d$ ) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- 4.Luminous flux measurement tolerance:±15%.
- 5.Forward voltage measurement tolerance:±0.15V.

|          |                              |          |            |      |        |
|----------|------------------------------|----------|------------|------|--------|
| Part No. | TX-3570W16FC120-NUFEZW-B04DT | Spec No. | WKF-EE0003 | Page | 4 of 9 |
|----------|------------------------------|----------|------------|------|--------|


## Typical Electrical/Optical Characteristics Curves



(25°C Ambient Temperature Unless Otherwise Noted)



Forward Current VS. Forward Voltage

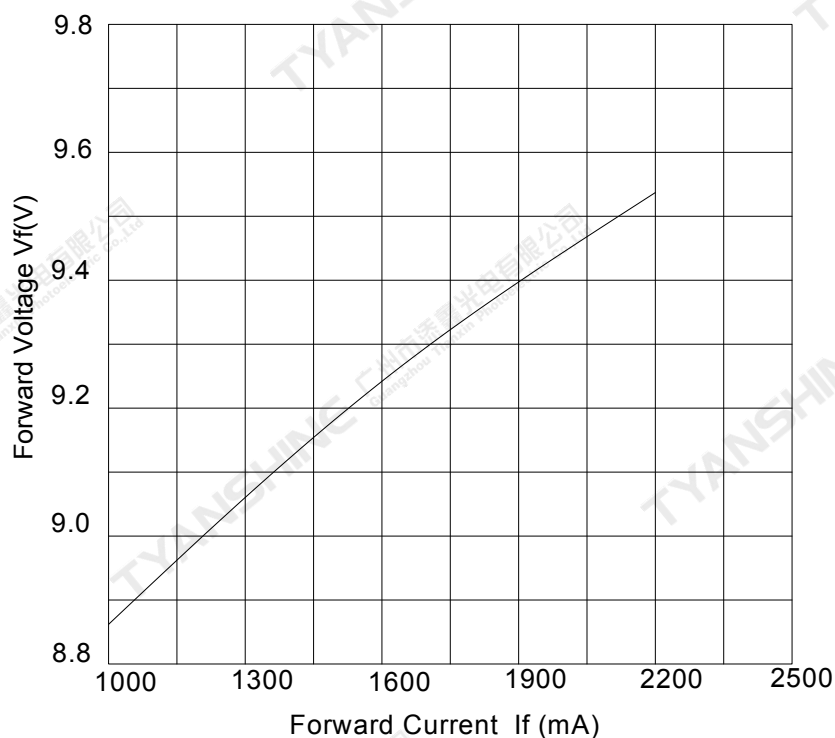

Forward Current VS. Luminous flux

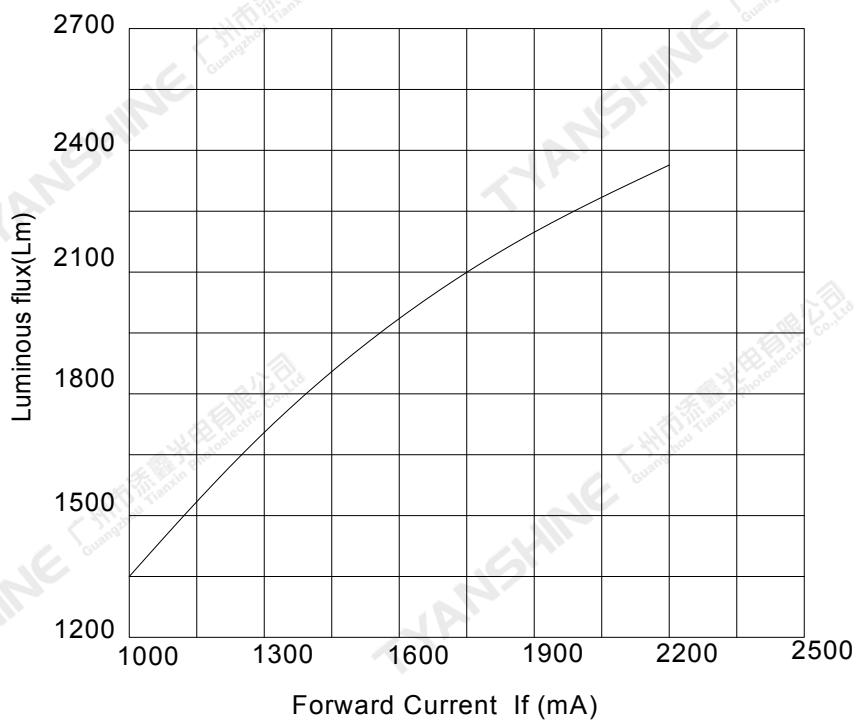

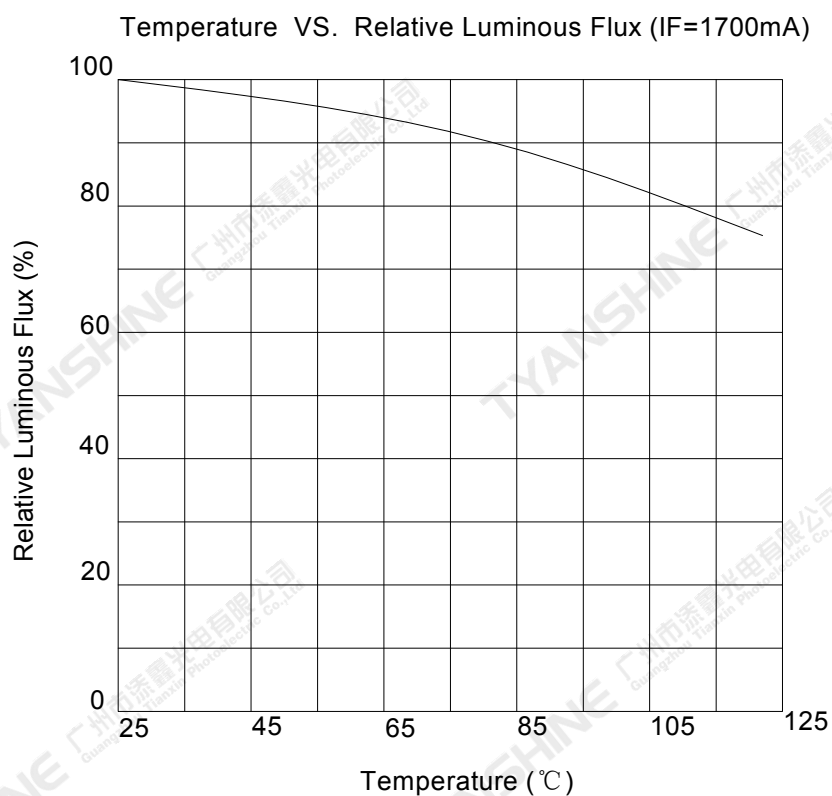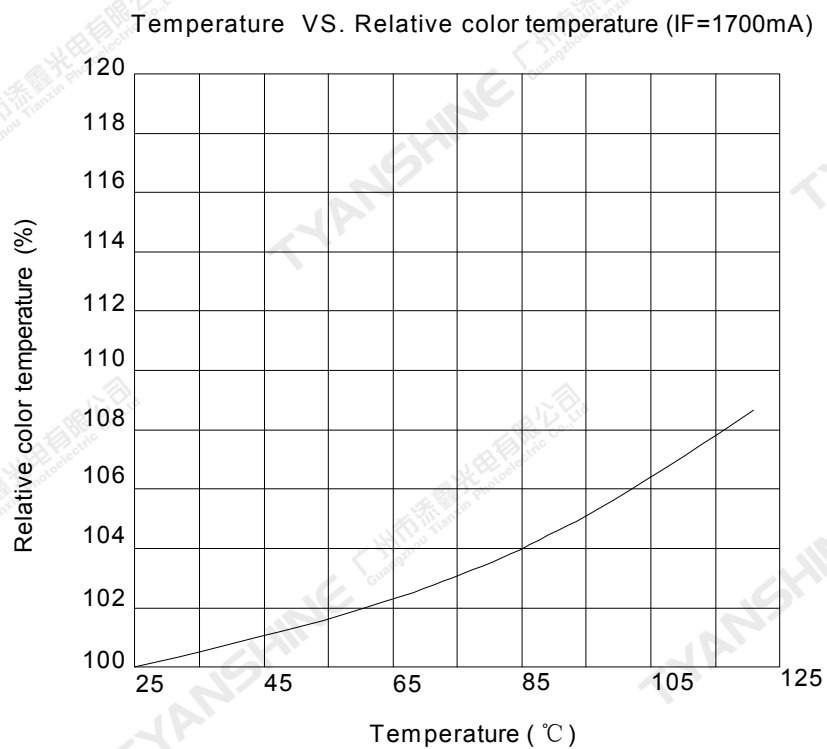

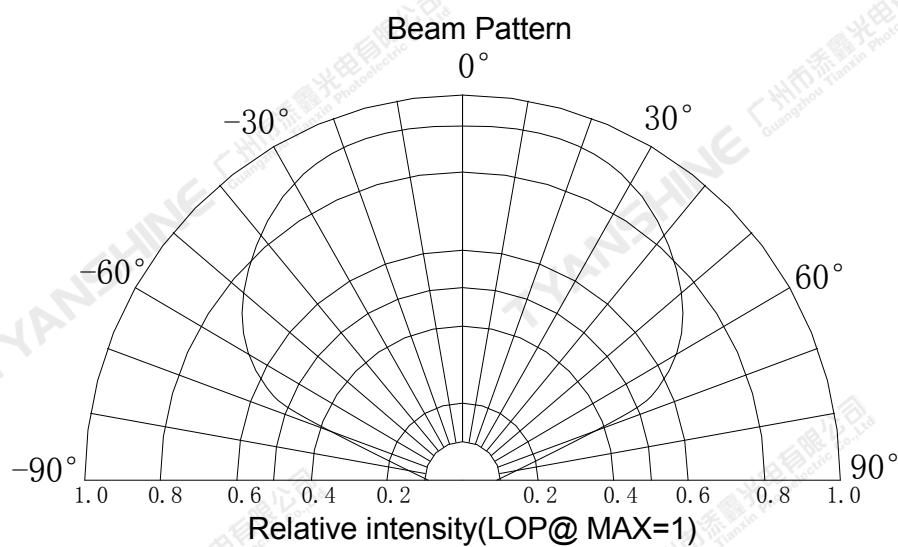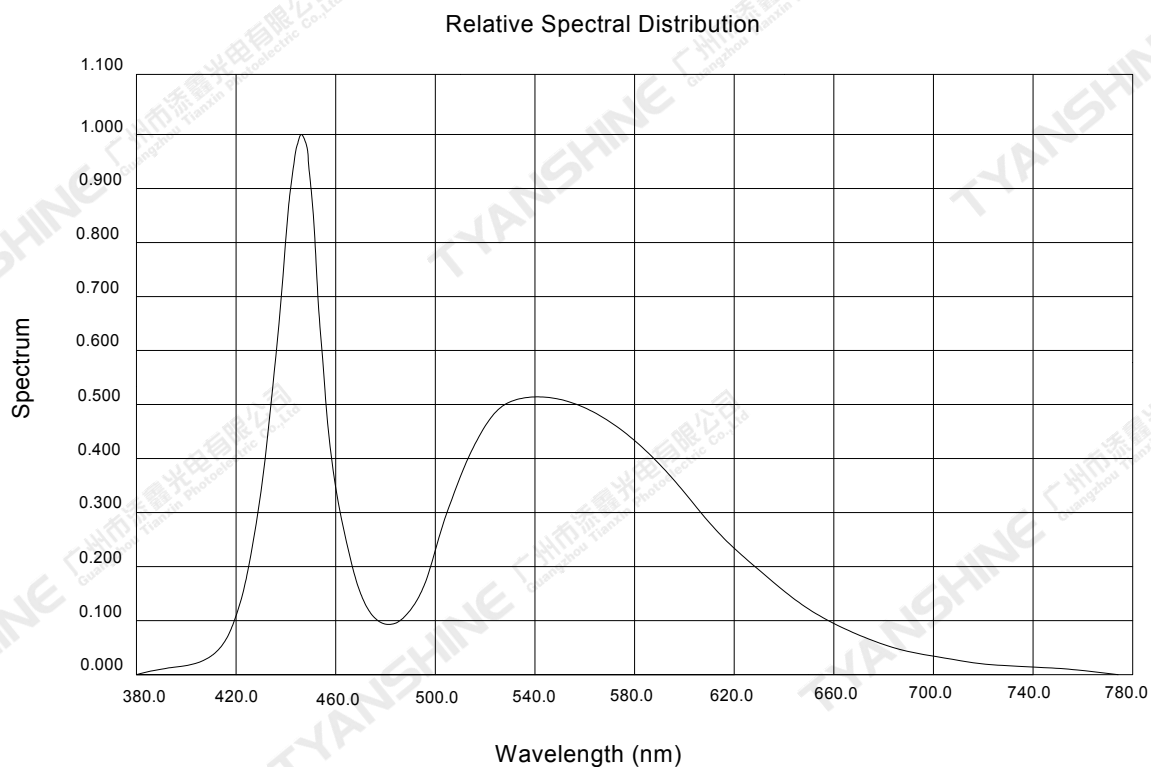**Notes:**

1.  $2\theta_{1/2}$  is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is  $\pm 5^\circ$ .


## Usage Precautions

### Storage Environment Condition

Temperature: 5℃ ~ 30℃ (41°F ~ 86°F)

Humidity: 60% RH Max.

### Soldering Condition

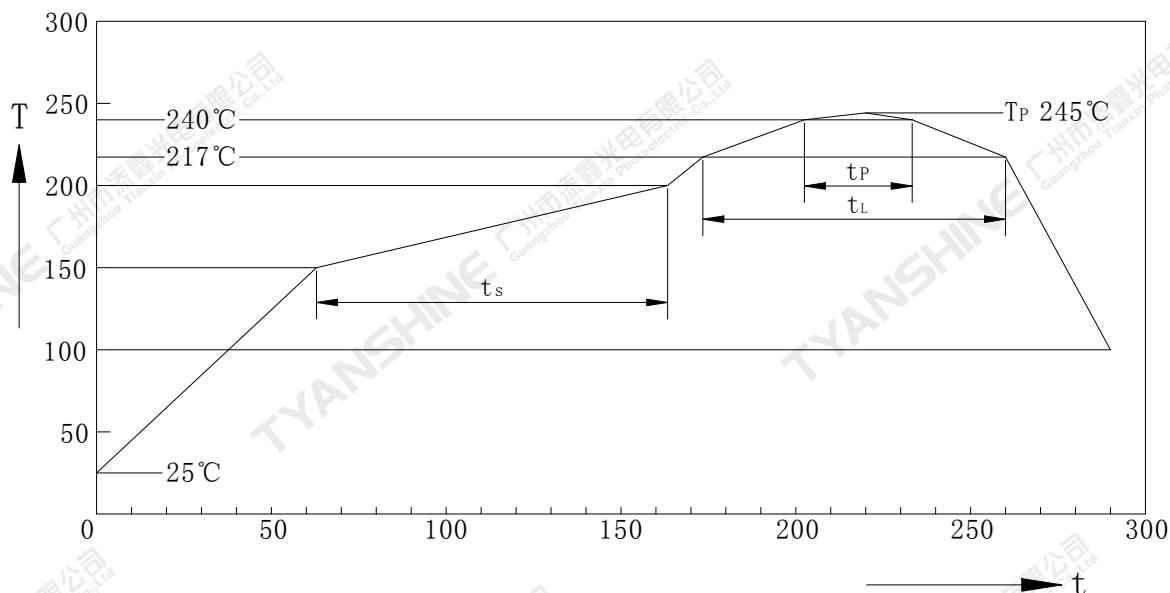


| Profil-Charakteristik<br>Profile Feature                           | Symbol | Pb-Free(SnAgCu)Assembly |                |         | Einheit<br>Unit |
|--------------------------------------------------------------------|--------|-------------------------|----------------|---------|-----------------|
|                                                                    |        | Minimum                 | Recommendation | Maximum |                 |
| Ramp-up Rate to Preheat<br>25°C to 150°C                           | —      | —                       | 2              | 3       | K/s             |
| Time $t_s$ $T_{Smin}$ to $T_{Smax}$                                | $t_s$  | 60                      | 100            | 120     | s               |
| Ramp-up Rate to Peak $T_{Smax}$ to $T_p$                           | —      | —                       | 2              | 3       | K/s             |
| Liquidus Temperature                                               | $T_L$  | 217                     |                |         | °C              |
| Time above Liquidus temperature                                    | $t_L$  | —                       | 80             | 100     | s               |
| Peak Temperature                                                   | $T_P$  | —                       | 245            | 260     | °C              |
| Time within 5°C of the specified peak<br>temperature $T_p \pm 5$ K | $t_p$  | 10                      | 20             | 30      | s               |
| Ramp-down Rate $T_p$ to 100°C                                      | —      | —                       | 3              | 6       | K/s             |
| Time 25°C to $T_p$                                                 | —      | —                       | —              | 480     | —               |

#### Note:

All temperatures refer to topside of the package, measured on the package body surface.

## Dimensions For Cannulation And Packaging

Quantity: 1000PCS

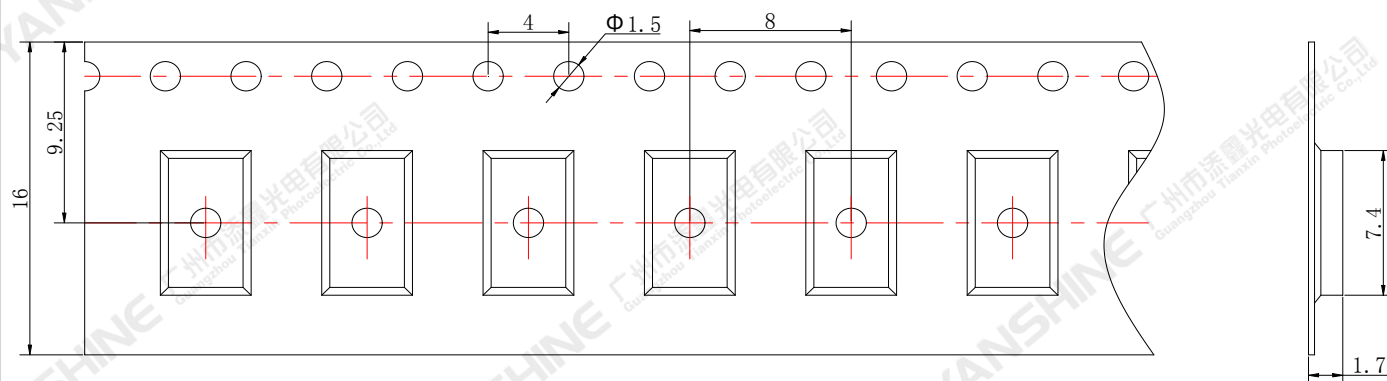

## Notes:

1. All dimensions are in millimeters.
2. Tolerances are  $\pm 2.0$  mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.