

TX-1518SW11A-2760V39-10H90

PRODUCT SPECIFICATION

Features:

- ◆Excellent transiting heat from LED chip operating under 500mA.
- ◆Provide uniform cross distribution of positive white and warm white dual color scheme, mixed pure.
- ◆High luminous output.
- ◆No UV.
- ◆Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆GaInN

Emitting Color:


- ◆White
- ◆Warm white

Applications:

- ◆Commercial lighting
- ◆General Lighting

Part No.	TX-1518SW11A-2760V39-10H90	Spec No.	WKF-DA0090	Page	1 of 9
----------	----------------------------	----------	------------	------	--------

Package Dimensions:

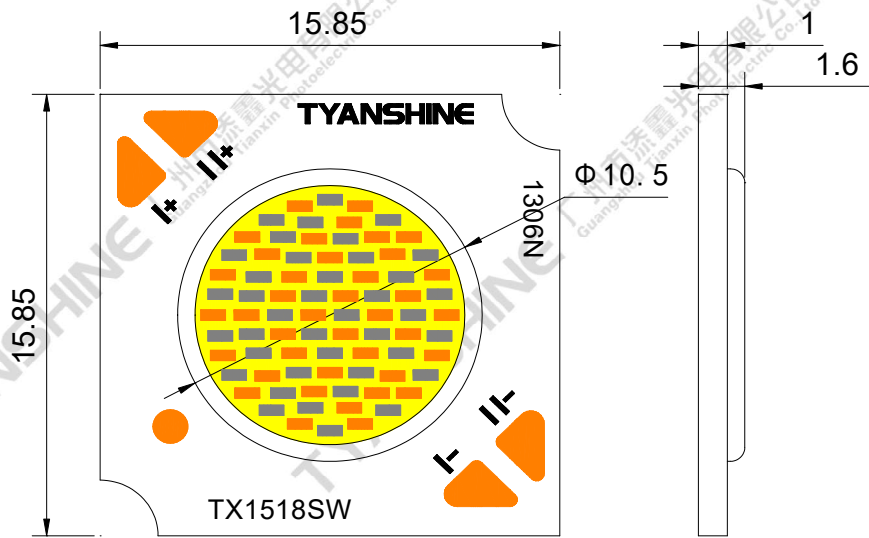

I: Warm White (S) II: White (W)

Notes:

- 1.All dimensions are in millimeters .
- 2.Tolerances unless otherwise mentioned are ±0.25mm .

Code Formats:

TX-1518SW11A-2760V39-10H90

TX	—	15	18	SW	11	A	—	2760	V39	—	10	H90
TYANSHINE	—	series	watt type	performance	LES	texture	—	CCT	VOL TS	—	BOM	Ra

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Forward Current	IF	500	mA
Reverse Voltage	VR	Not designed for reverse operation	V
Power Dissipation	PD	S	W
		W	
		S+W	
Junction Temperature	Tj	S	℃
		W	
Case Temperature (C)	Tc	85	℃
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Storage Temperature	Tstg	-30~+80	℃
Operation Temperature	Topr	-30~+85	

Notes:

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.



Electrical Optical Characteristics (Tc=25°C)



Parameter	Symbol	Condition	Emitting color	Min.	Typ.	Max.	Units
Luminous Flux	φ_v	If=350mA	S	1050	1250	1400	lm
			W	1400	1600	1800	
Forward Voltage	V_f		S	35	37	39	V
			W	35	37	39	
Correlated Colour Temperature	CCT		S	2620	2700	2760	K
			W	5750	6000	6300	
Viewing Angle at 50 % IV	$2\theta_{1/2}$		S	—	115	—	Deg
			W	—	115	—	
Reverse Current	I_R	—	—	—	—	μA	
Thermal Resistance Junction to Case	$R\theta_{J-C}$	If=350mA	—	—	1.9	—	K/W
Color Rendering Index	Ra	If=350mA	S	90	—	—	—
			W	90	—	—	



- Notes:**
- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
 - 2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
 - 3.Luminous flux measurement tolerance:±15%.
 - 4.Forward voltage measurement tolerance:±3%.
 - 5.Ra measurement tolerance: ±2.

Typical Electrical/Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

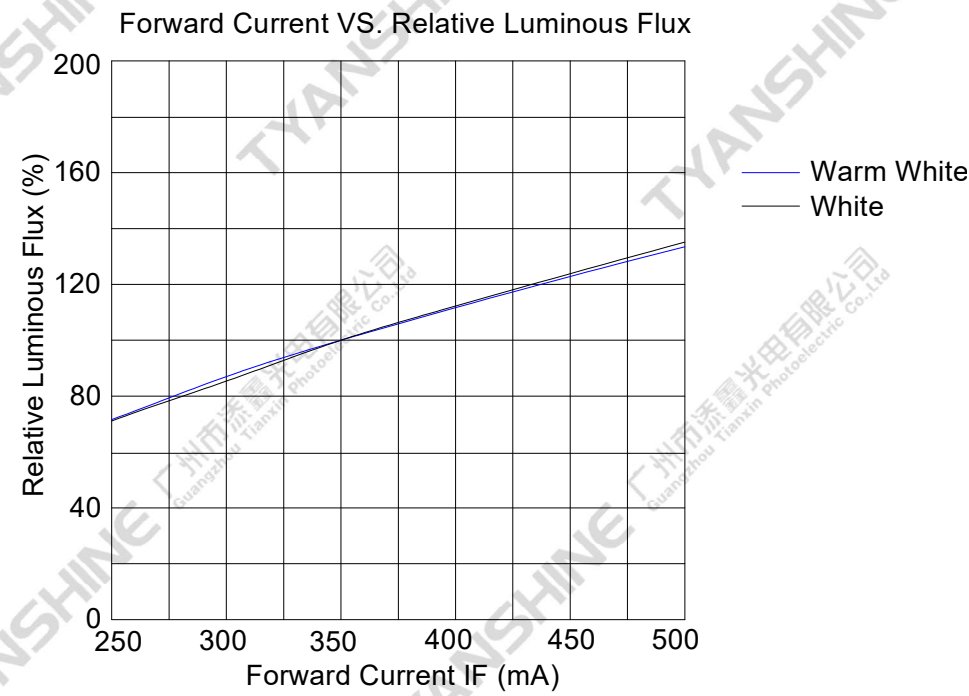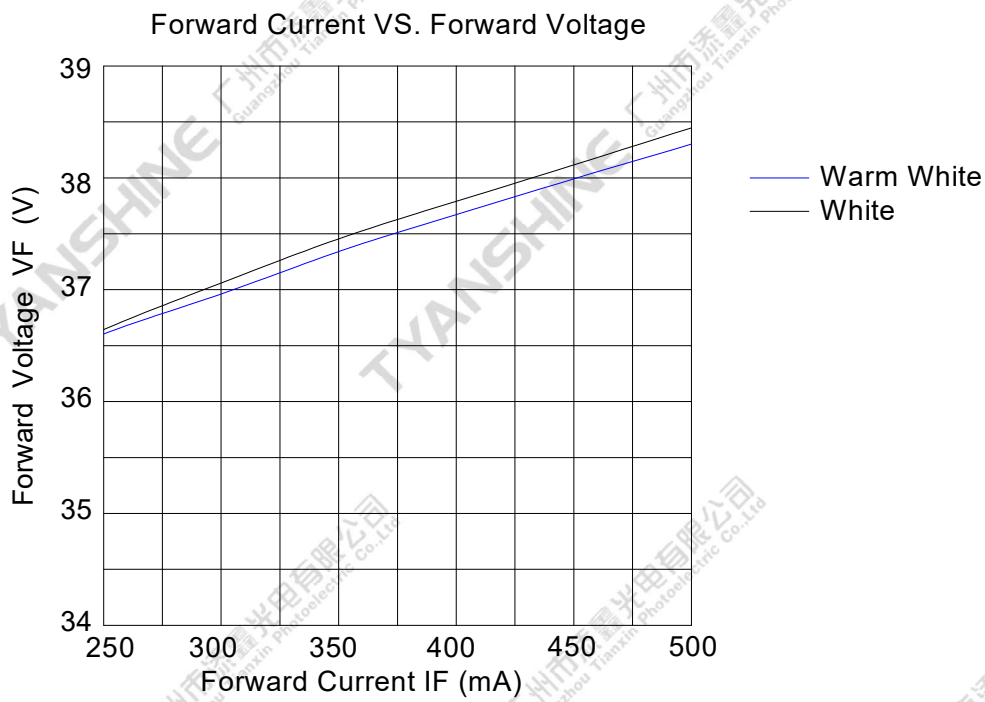

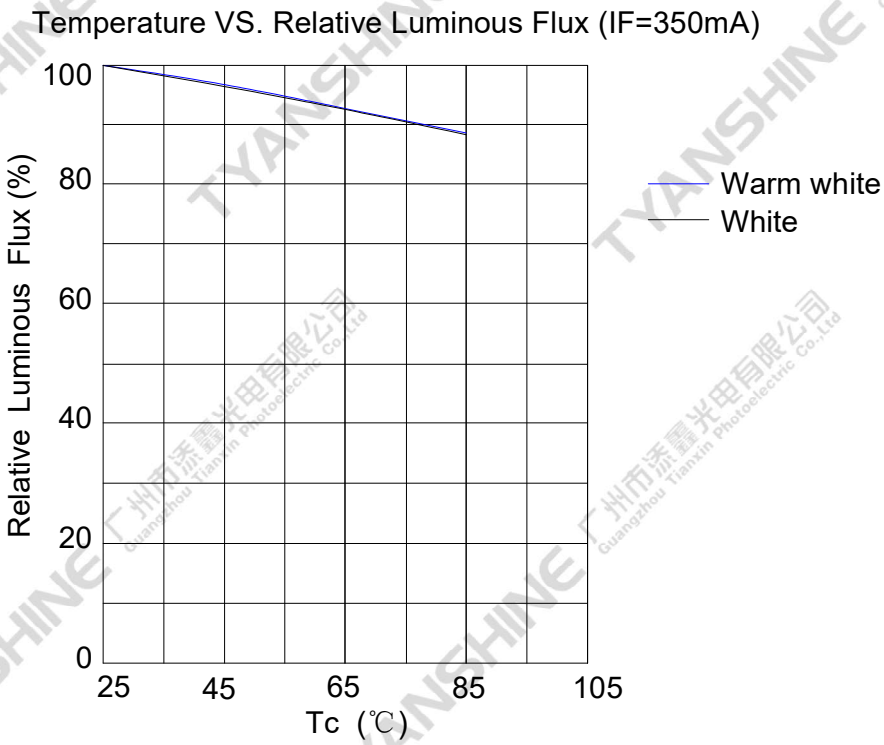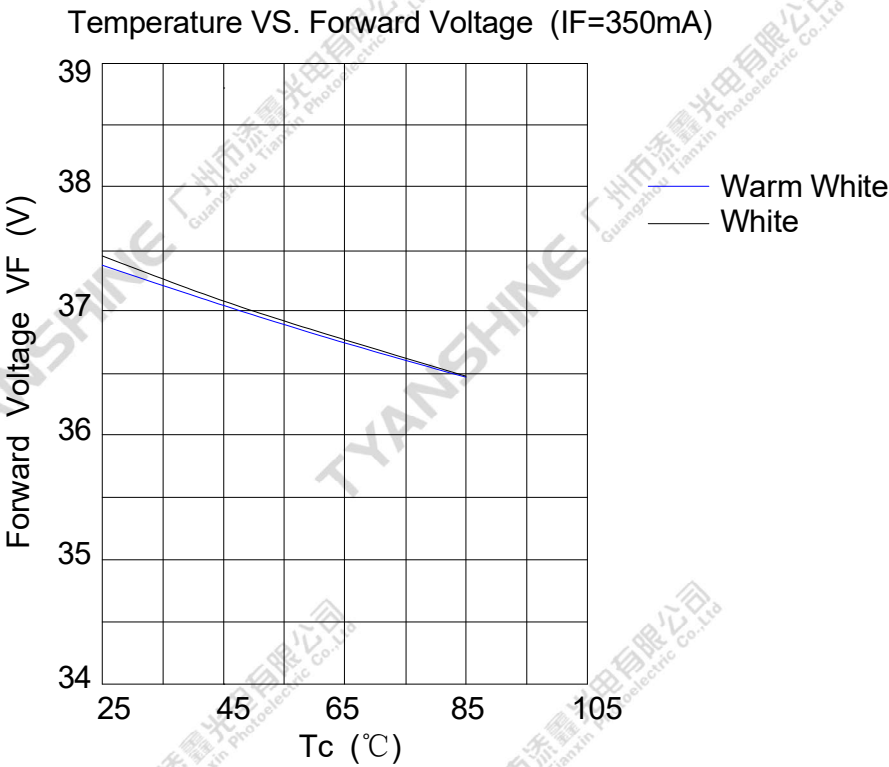


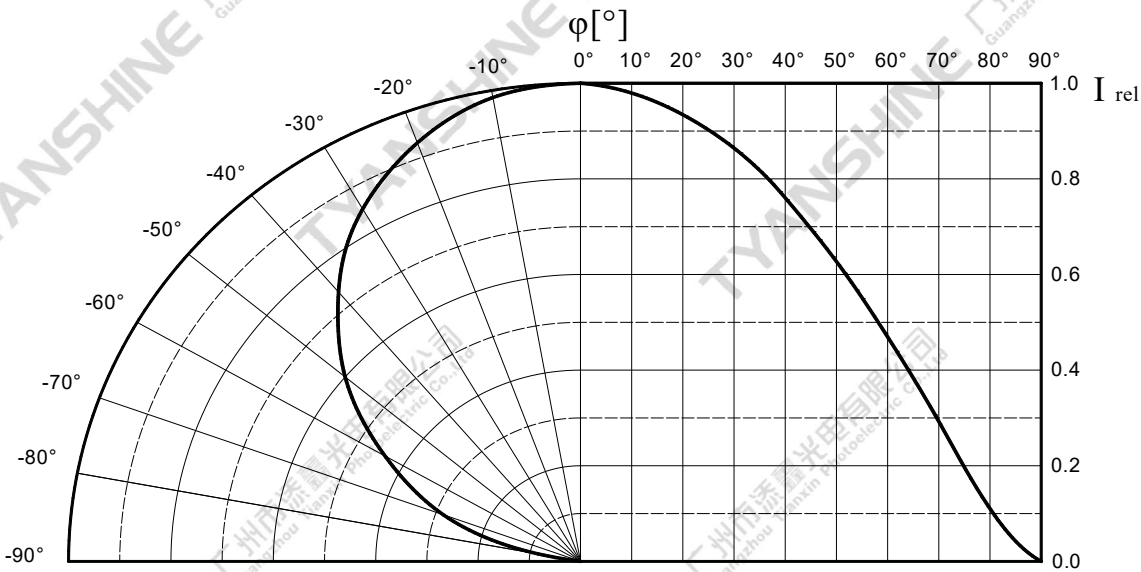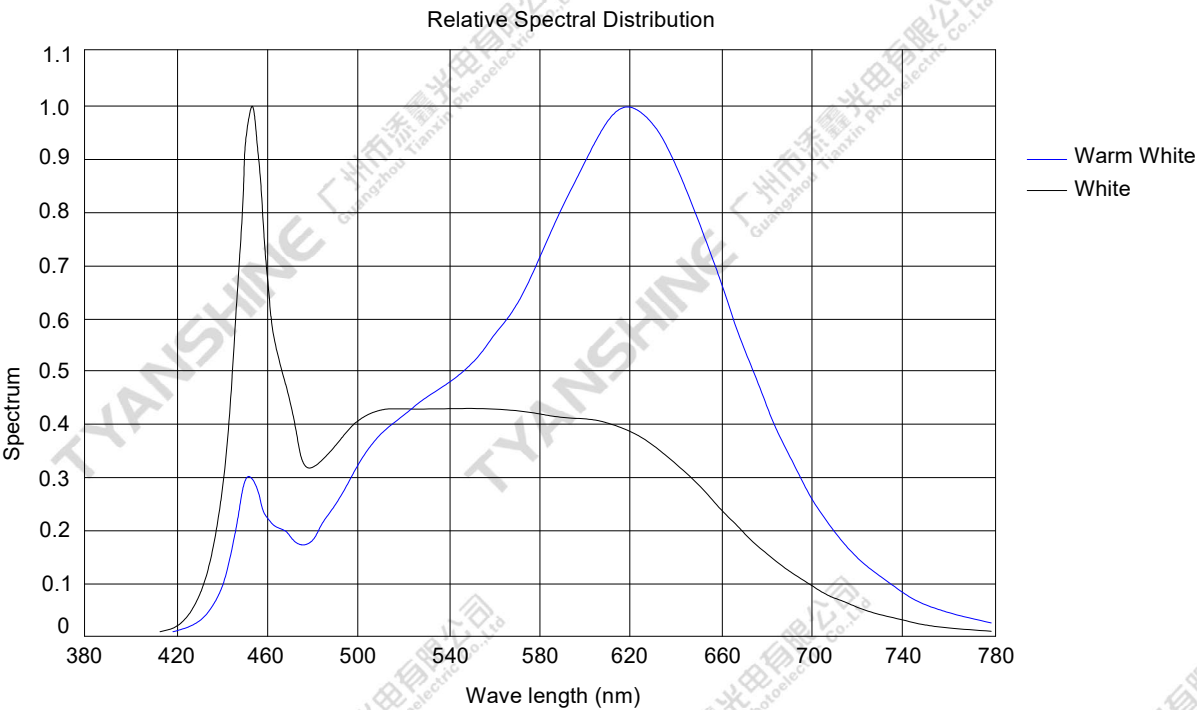

Notes:

1. $2\theta \frac{1}{2}$ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is $\pm 5^\circ$.

Chromaticity Coordinates （Condition:IF=350mA,Tc=25℃）

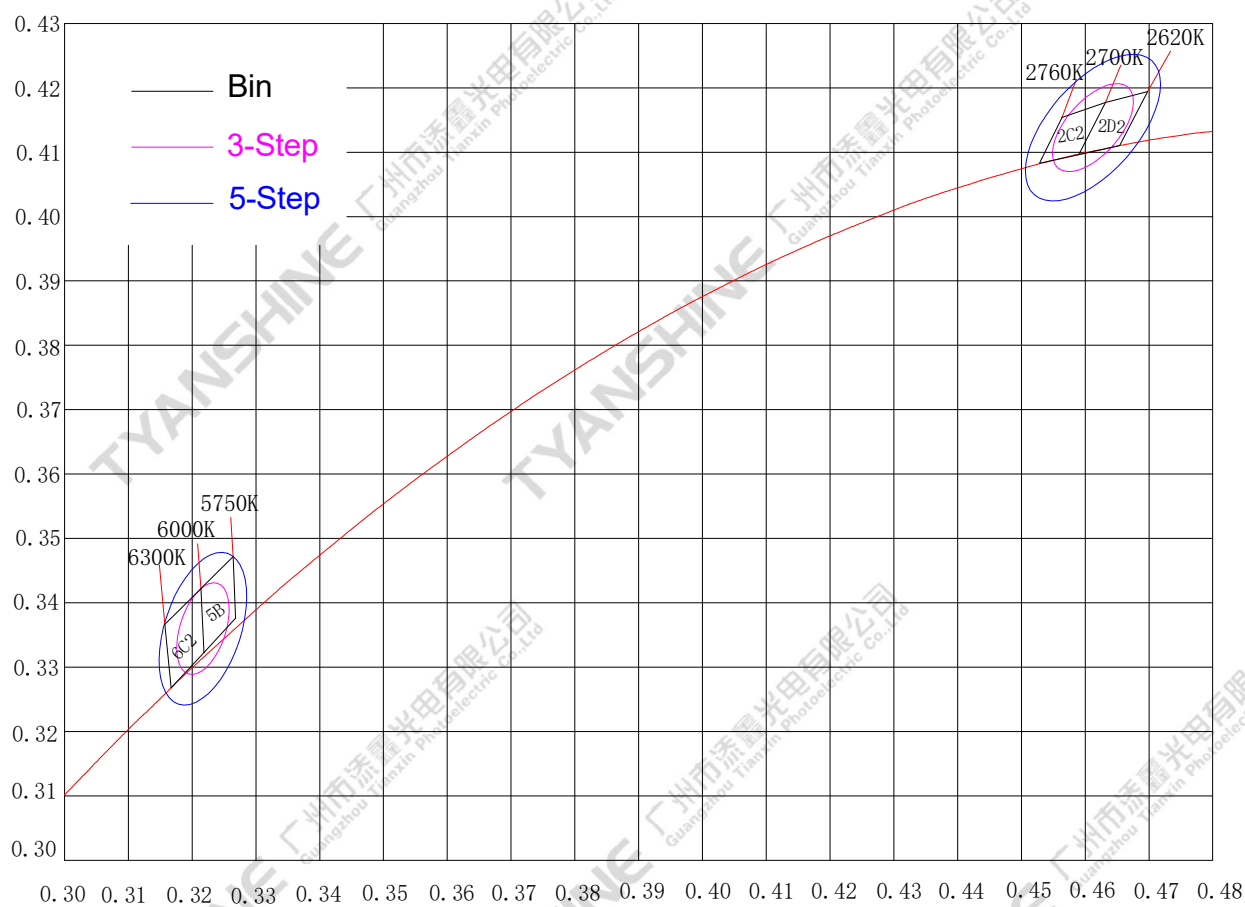

Notes:


1. Chromaticity (x,y) measurements tolerance:±0.005.

Reliability Test

Test Item	Test Condition
Continuous Operation Test	IF=350mA Ta=25℃×1000hrs
Low Temperature Storage Test	-30℃×1000hrs
High Temperature Storage Test	100℃×1000hrs
Moisture-proof Test	85℃，85%RH for 500 hours
Thermal Shock Test	-30℃×30minutes-100℃×30minutes,100 cycle

Dimensions For Cannulation And Packaging

Quantity: 36PCS

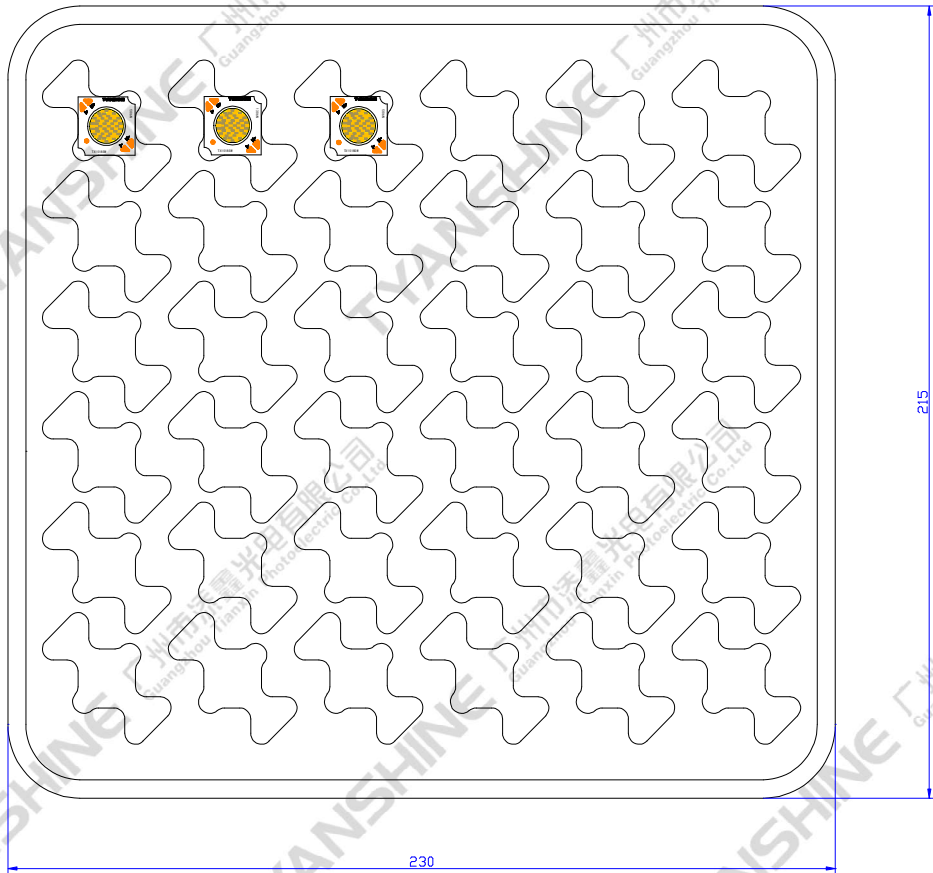

Notes:

- 1. All dimensions are in millimeters.
- 2. Tolerances are ± 2.0 mm unless otherwise noted.
- 3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.