

TX-1524SW11A-2740V39-03H90

PRODUCT SPECIFICATION

Features:

- ◆Excellent transiting heat from LED chip operating under 700mA.
- ◆Provide uniform cross distribution of positive white and warm white dual color scheme, mixed pure.
- ◆High luminous output.
- ◆No UV.
- ◆Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆GaInN

Emitting Color:

- ◆White
- ◆Warm white

Applications:

- ◆Commercial lighting
- ◆General Lighting

Part No.	TX-1524SW11A-2740V39-03H90	Spec No.	WKF-DA0141	Page	1 of 7
----------	----------------------------	----------	------------	------	--------

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Forward Current	IF	700	mA
Reverse Voltage	V _R	Not designed for reverse operation	V
Power Dissipation	P _D	S	W
		W	
		S+W	
Junction Temperature	T _j	S	℃
		W	
Case Temperature (C)	T _c	85	℃
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Storage Temperature	T _{stg}	-30~+80	℃
Operation Temperature	T _{opr}	-30~+85	

Notes:

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics (Tc=25°C)



Parameter	Symbol	Condition	Emitting color	Min.	Typ.	Max.	Units
Luminous Flux	ϕ_v	If=500mA	S	1610	1800	2100	lm
			W	1840	2100	2400	
Forward Voltage	V_f		S	35	37	39	V
			W	35	37	39	
Correlated Colour Temperature	CCT		S	2680	—	2780	K
			W	3920	—	4120	
Viewing Angle at 50 % IV	$2\theta_{1/2}$		S	—	115	—	Deg
			W	—	115	—	
Reverse Current	I_R		—	—	—	—	μA
Thermal Resistance Junction to Case	$R\theta_{J-C}$	—	—	—	1.45	—	K/W
Color Rendering Index	Ra	If=500mA	S	90	—	—	—
			W	90	—	—	

Notes:

- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.Luminous flux measurement tolerance: $\pm 15\%$.
- 4.Forward voltage measurement tolerance: $\pm 3\%$.
- 5.Ra measurement tolerance: ± 2 .

Typical Electrical/Optical Characteristics Curves


(25℃ Ambient Temperature Unless Otherwise Noted)

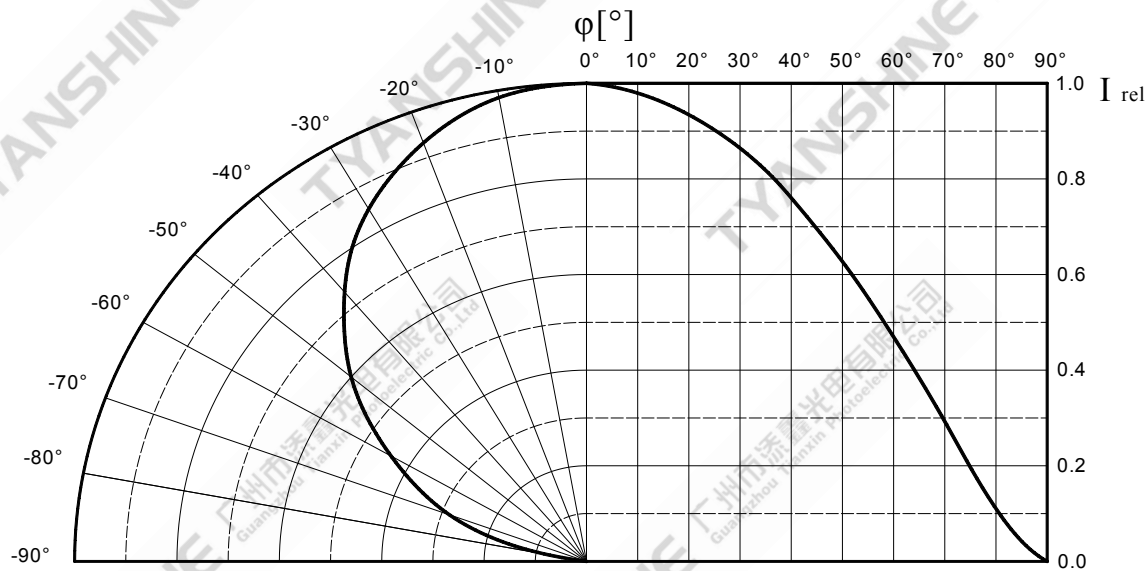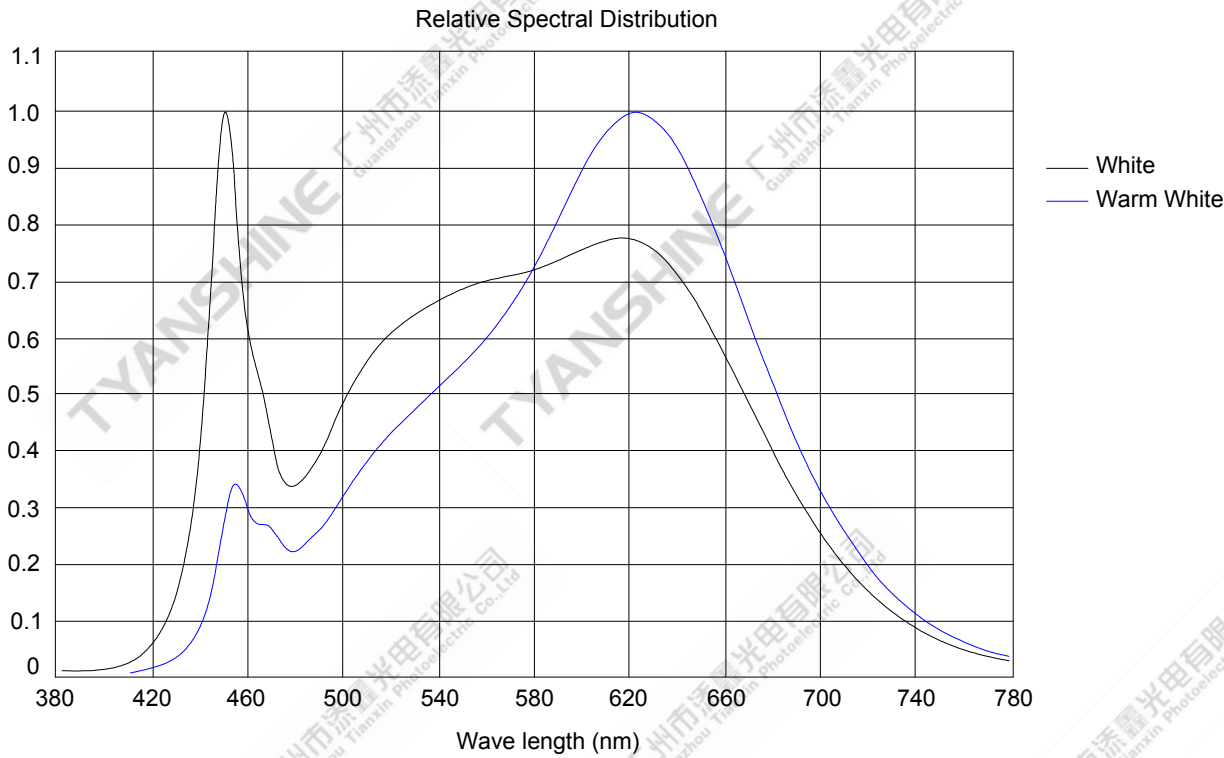

Notes:

1. $2\theta_{1/2}$ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is $\pm 5^\circ$.

Chromaticity Coordinates (Condition:IF=500mA,Tc=25℃)

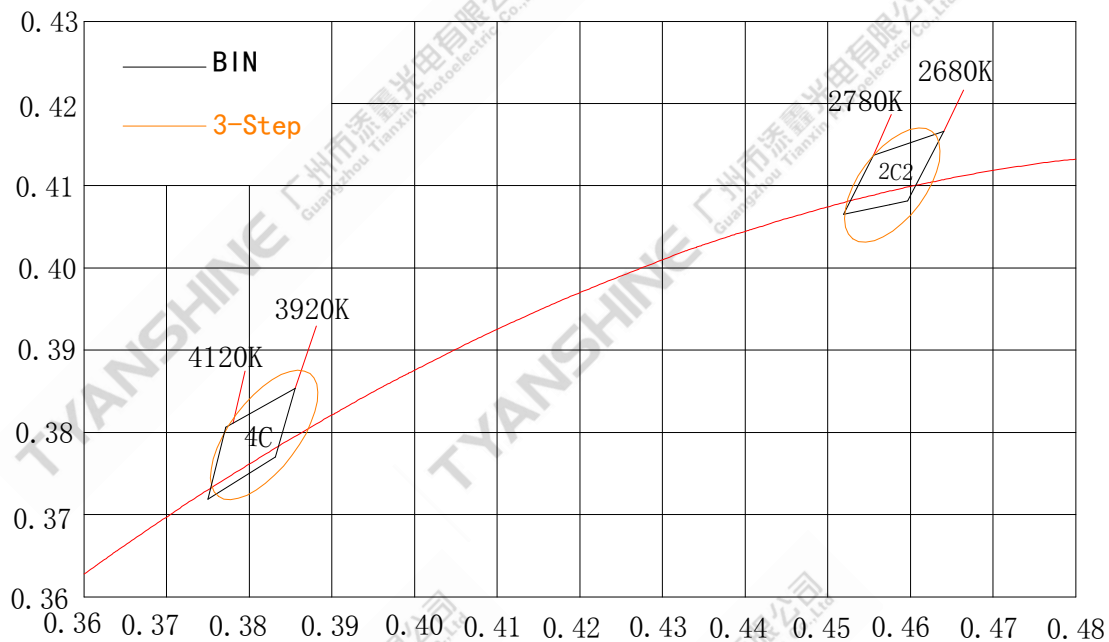

3-step					
CCT	Center Point		Major Axis		Rotation Angle (°)
	x	y	a	b	
2700K	0.4578	0.4101	0.0081	0.00403	54
4000K	0.3818	0.3797	0.0093	0.0042	53.4

Notes:

1. Chromaticity (x,y) measurements tolerance: ± 0.005 .


Reliability Test

Test Item	Test Condition
Continuous Operation Test	IF=500mA Ta=25℃ × 1000hrs
Low Temperature Storage Test	-30℃ × 1000hrs
High Temperature Storage Test	100℃ × 1000hrs
Moisture-proof Test	85℃, 85%RH for 500 hours
Thermal Shock Test	-30℃ × 30minutes-100℃ × 30minutes, 100 cycle

Part No.	TX-1524SW11A-2740V39-03H90	Spec No.	WKF-DA0141	Page	6 of 7
----------	----------------------------	----------	------------	------	--------

Dimensions For Cannulation And Packaging

Quantity: 36PCS

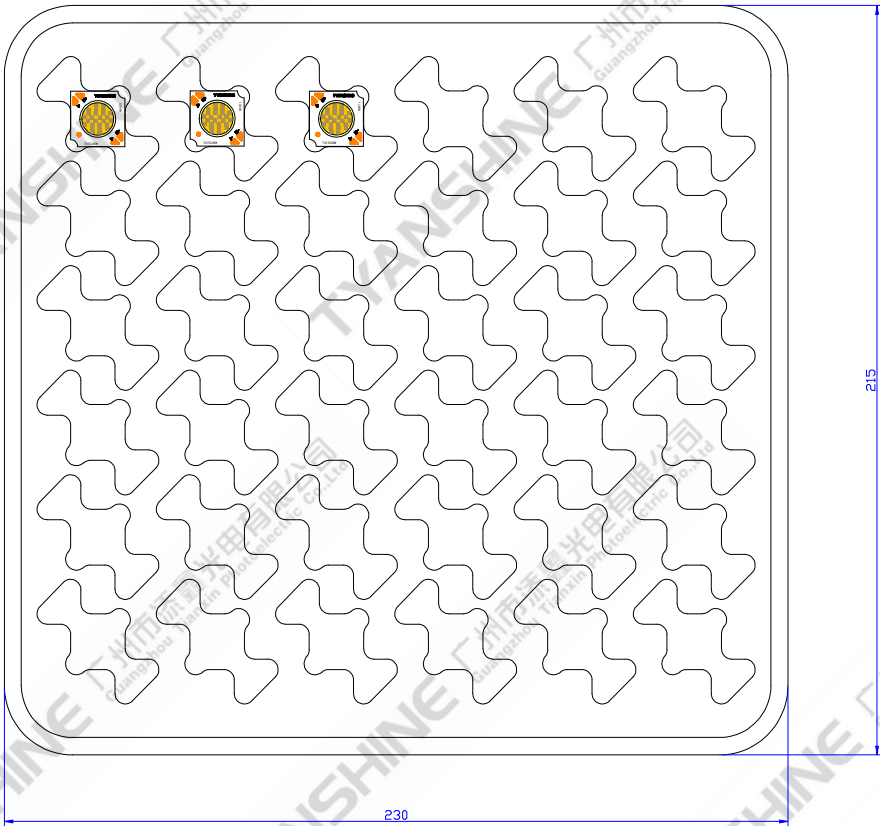

Notes:

- 1. All dimensions are in millimeters.
- 2. Tolerances are ± 2.0 mm unless otherwise noted.
- 3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.

Part No.	TX-1524SW11A-2740V39-03H90	Spec No.	WKF-DA0141	Page	7 of 7
----------	----------------------------	----------	------------	------	--------