

TX-2828SW200C25F13-03H952770**PRODUCT SPECIFICATION****Features:**

- ◆Excellent transiting heat from LED chip operating under 2800mA.
- ◆Provide uniform cross distribution of positive white and warm white dual color scheme, mixed pure.
- ◆High luminous output.
- ◆No UV.
- ◆Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆GaInN

Emitting Color:


- ◆White
- ◆Warm white

Applications:

- ◆Commercial lighting
- ◆General Lighting

Part No.	TX-2828SW200C25F13-03H952770	Spec No.	WKF-DB0028	Page	1 of 9
----------	------------------------------	----------	------------	------	--------

Package Dimensions:

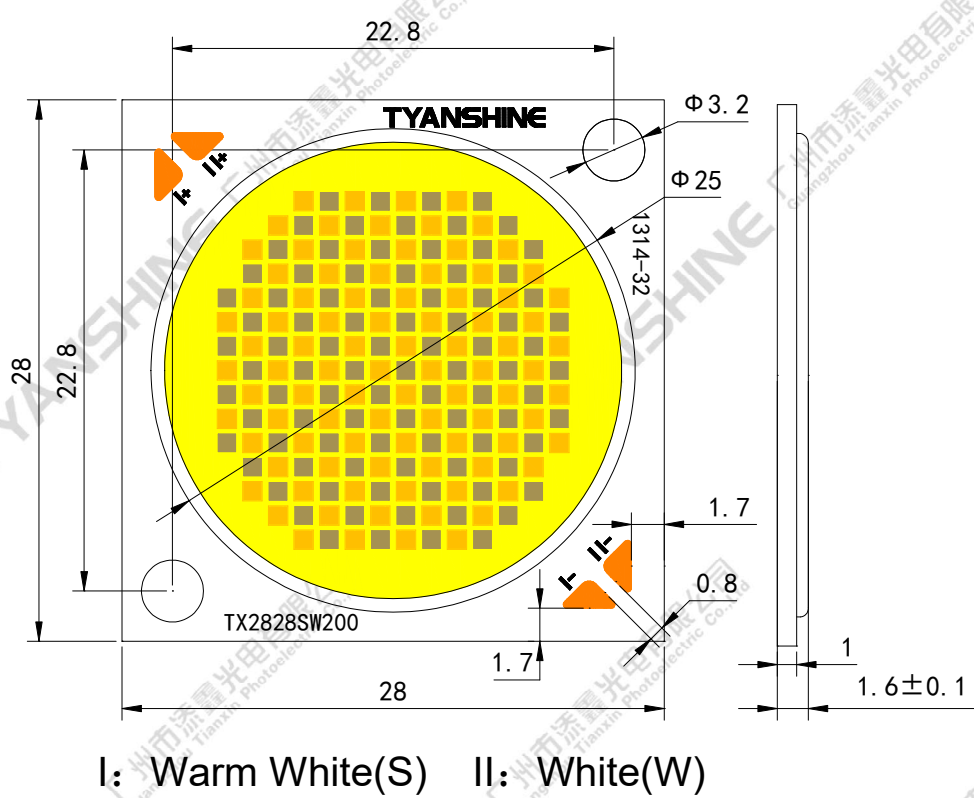

I: Warm White(S) II: White(W)

Notes:

- 1.All dimensions are in millimeters .
- 2.Tolerances unless otherwise mentioned are ±0.25mm .

Code Formats:

TX-2828SW200C25F13-03H952770

TX	—	2828	SW	200	C	25	F	13	—	03	H95	2770
TYANSHINE	—	series	performance	watt typ	texture	LES	chip code	die count in series	—	BOM	Ra	CCT

Part No.	TX-2828SW200C25F13-03H952770	Spec No.	WKF-DB0028	Page	2 of 9
----------	------------------------------	----------	------------	------	--------

Absolute Maximum Ratings

Parameter	Symbol		Ratings	Unit
Forward Current	IF		2800	mA
Reverse Voltage	VR		Not designed for reverse operation	V
Power Dissipation	PD	W	110	W
		S	110	
		S+W	110	
Junction Temperature	Tj	W	150	℃
		S	150	
Case Temperature (C)	Tc		85	℃
Electrostatic Discharge Threshold (ESD)	ESD		2000	V
Storage Temperature	Tstg		-30~+80	℃
Operation Temperature	Topr		-30~+85	

Notes:



- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.



Part No.	TX-2828SW200C25F13-03H952770	Spec No.	WKF-DB0028	Page	3 of 9
----------	------------------------------	----------	------------	------	--------



Electrical Optical Characteristics (Tc=25°C)								
Parameter	Symbol	Condition	Emitting color	Min.	Typ.	Max.	Units	
Luminous Flux	ϕ_v	If=2600mA	S	6000	6900	7800	lm	
			W	8500	9700	11000		
Forward Voltage	V_f		S	36	38	40	V	
			W	36	38	40		
Correlated Colour Temperature	CCT		S	2600	2670	2740	K	
			W	6600	6900	7200		
Viewing Angle at 50 % IV	$2\theta_{1/2}$		S	—	115	—	Deg	
			W	—	115	—		
Reverse Current	I_R	—	—	—	—	—	μA	
Thermal Resistance Junction to Case	$R\theta_{J-C}$	If=2600mA	S	—	0.15	—	K/W	
			W	—	0.15	—		
Temperature Coefficient of Voltage	$V\Delta F/T$		S	—	-15.5	—	mV/°C	
			W	—	-15.5	—		
Color Rendering Index	Ra		S	95	—	—	—	
			W	95	—	—		
Notes: 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve. 2.$\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity. 3.Luminous flux measurement tolerance:±15%. 4.Forward voltage measurement tolerance:±3%. 5.Ra measurement tolerance:±2.								
Part No.	TX-2828SW200C25F13-03H952770			Spec No.	WKF-DB0028	Page	4 of 9	

Typical Electrical/Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

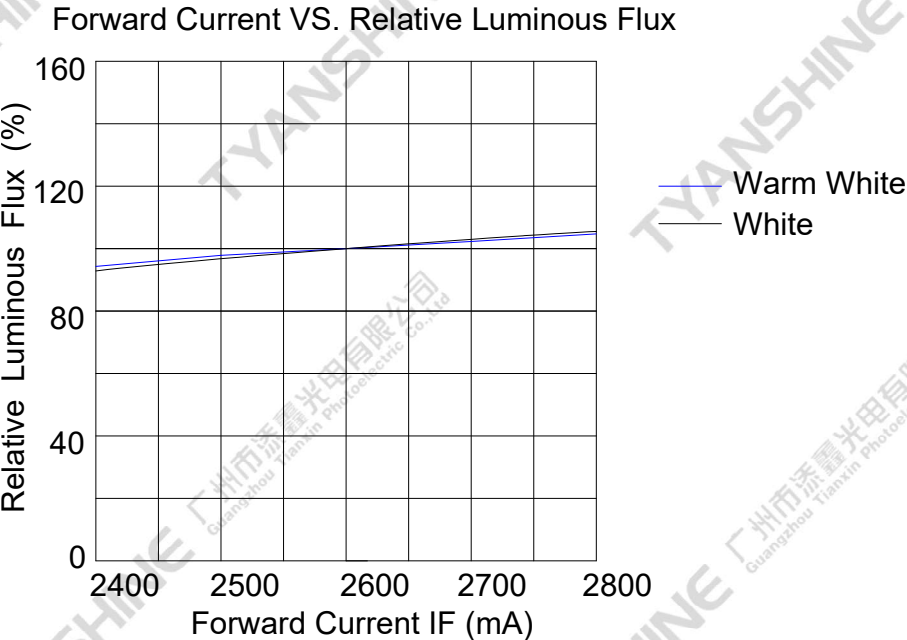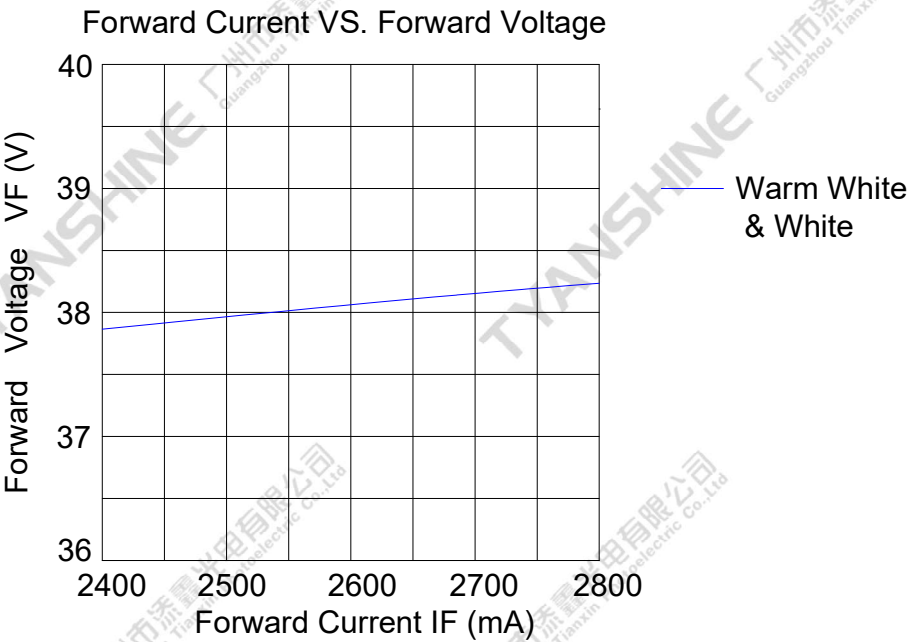

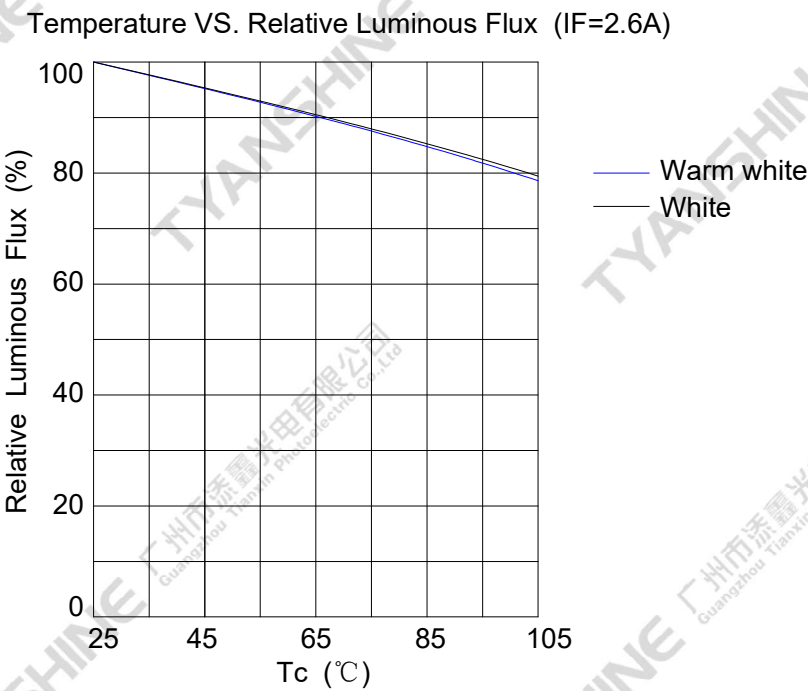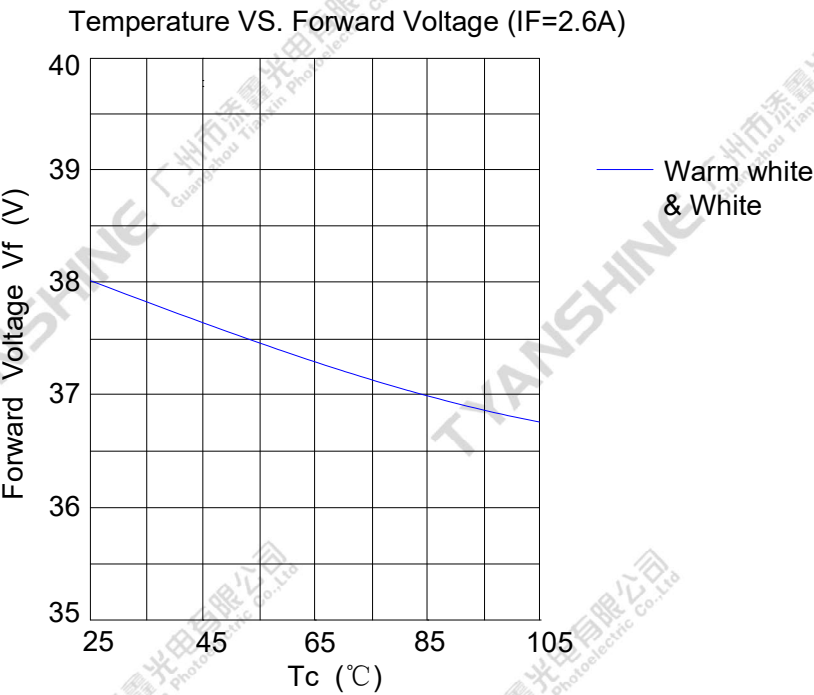


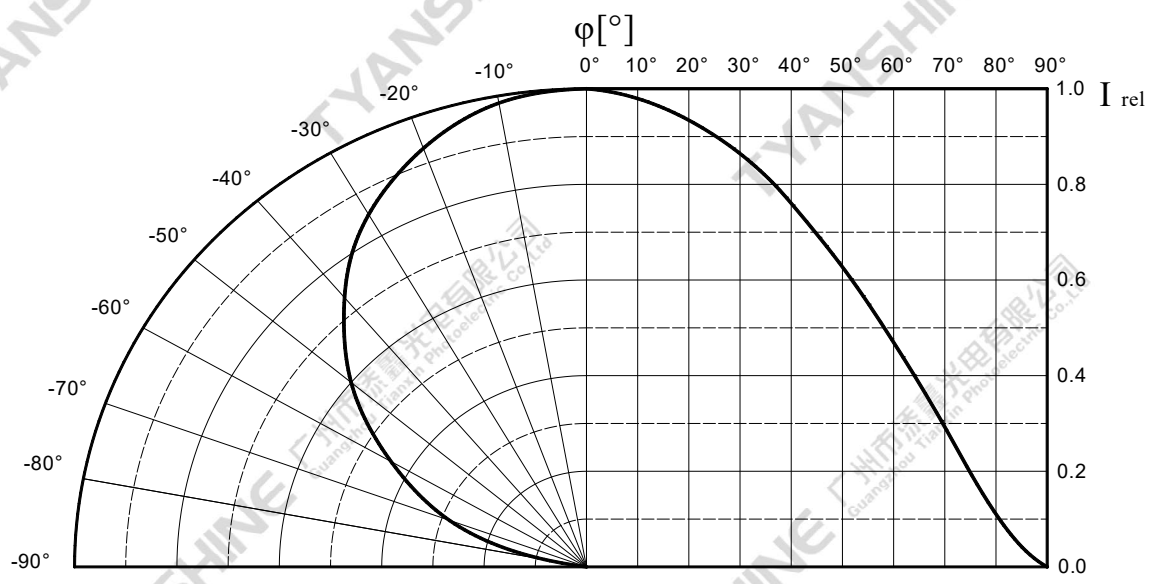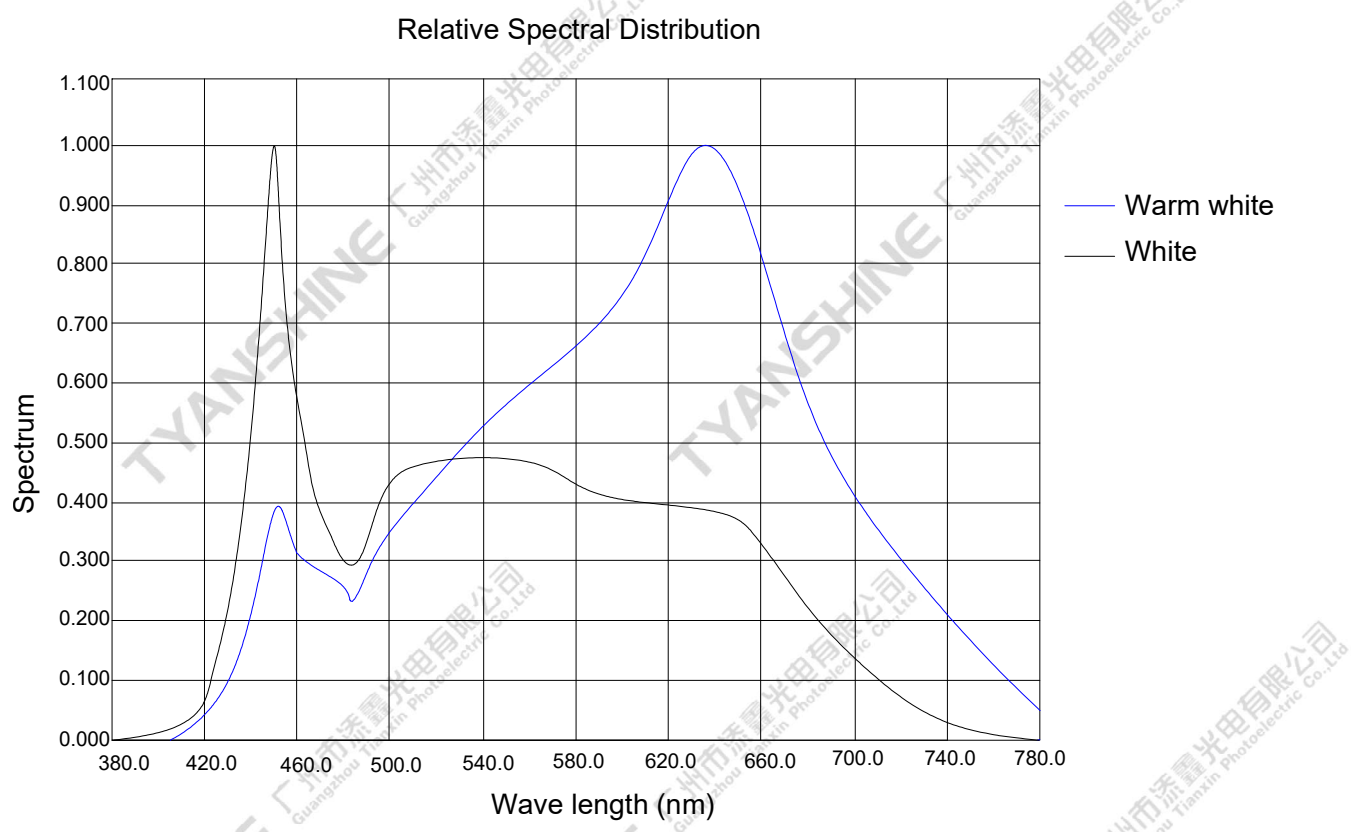

Notes:

- 2θ 1/2 is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
- View angle tolerance is ± 5°.

Chromaticity Coordinates (Condition: IF=2600mA, Tc=25℃)

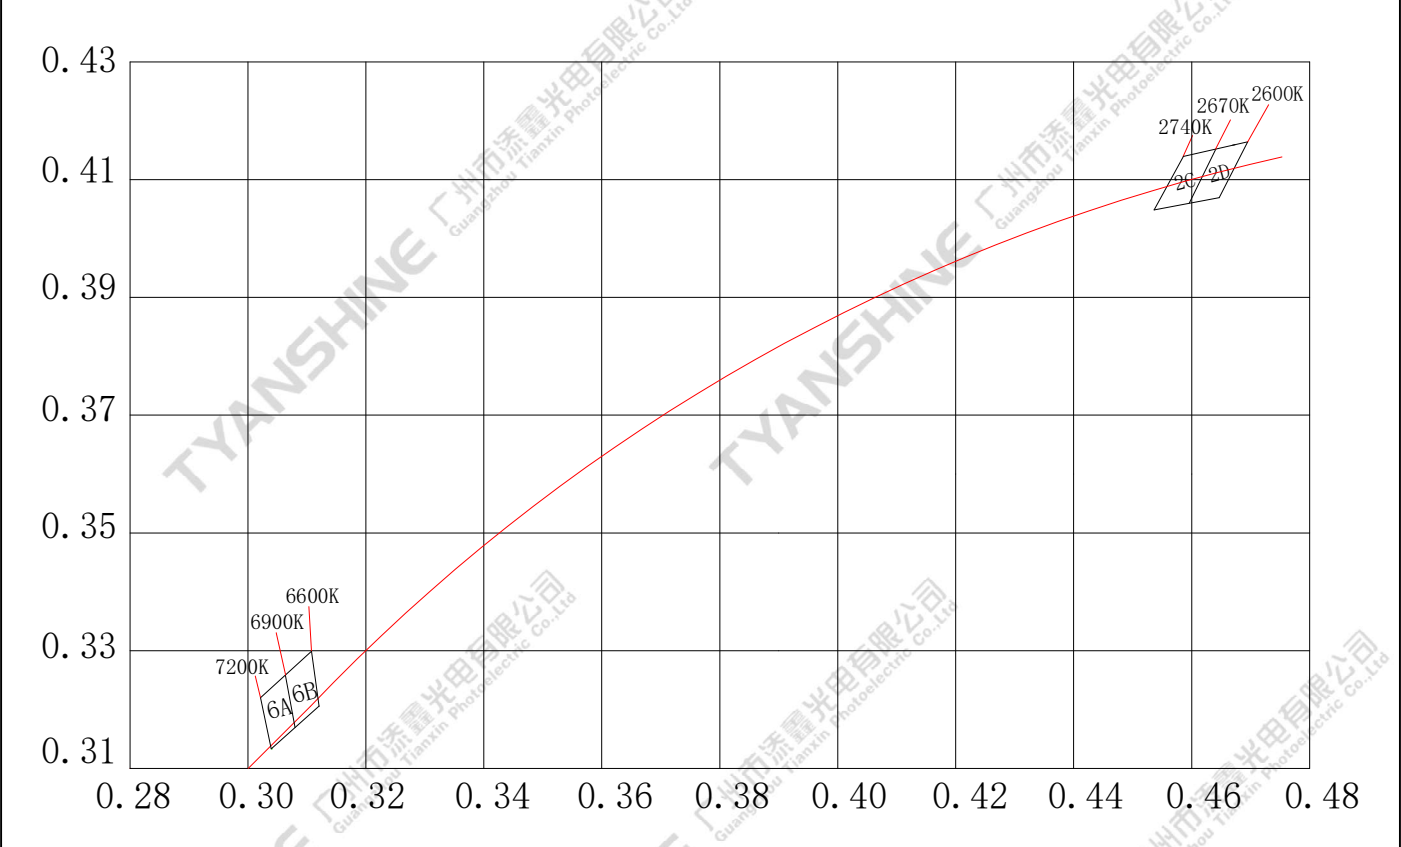

Notes:


1.chromaticity (x, y) measurements tolerance: ±0.005.

Reliability Test

Test Item	Test Condition
Continuous Operation Test	IF=2600mA Ta=25℃ ×1000hrs
Low Temperature Storage Test	-30℃ × 1000 hours
High Temperature Storage Test	100 ℃ × 1000 hours
Moisture-proof Test	85 ℃, 85 %RH for 500 hours
Thermal Shock Test	-40 ℃ × 15 minutes – 125 ℃ × 15 minutes, 100 cycle

Dimensions For Cannulation And Packaging

Quantity:20 PCS

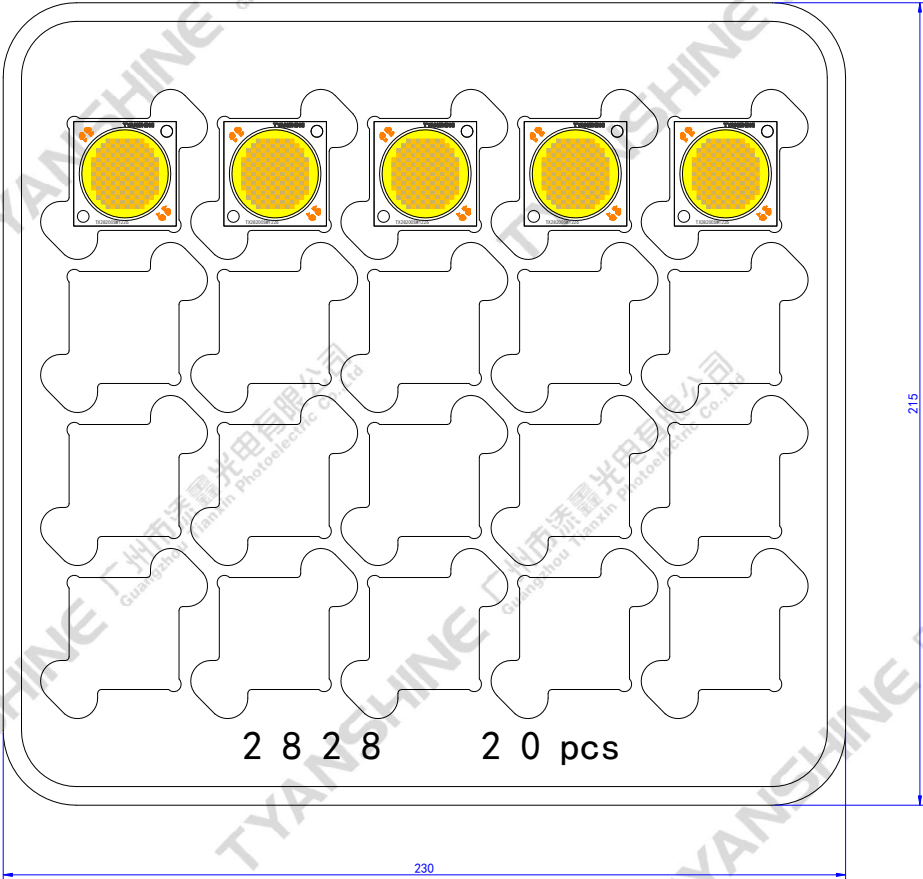

Notes:

- 1. All dimensions are in millimeters.
- 2. Tolerances are ± 2.0 mm unless otherwise noted.
- 3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.