

TX-1518SW11F13-08H902760

PRODUCT SPECIFICATION

Features:

- ◆Excellent transiting heat from LED chip operating under 500mA.
- ◆Provide uniform cross distribution of positive white and warm white dual color scheme, mixed pure.
- ◆High luminous output.
- ◆No UV.
- ◆Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆GaInN

Emitting Color:


- ◆White
- ◆Warm white

Applications:

- ◆Commercial lighting
- ◆General Lighting

Part No.	TX-1518SW11F13-08H902760	Spec No.	WKF-DA0198	Page	1 of 9
----------	--------------------------	----------	------------	------	--------

Package Dimensions:

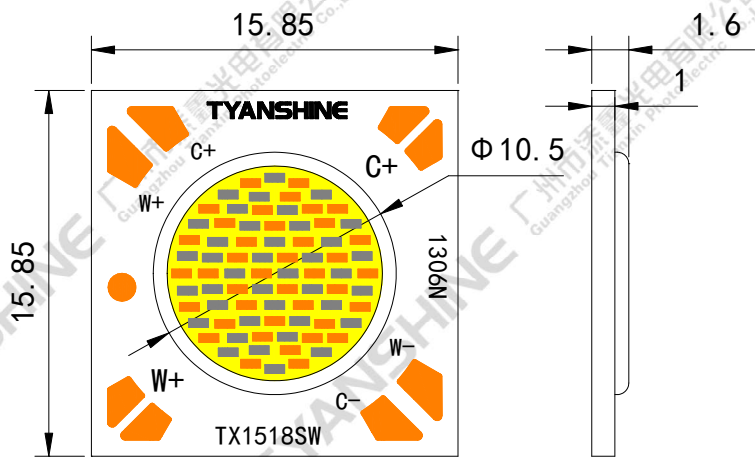


W:Warm White; C:White

Notes:

- 1.All dimensions are in millimeters .
- 2.Tolerances unless otherwise mentioned are $\pm 0.25\text{mm}$.

Connections:

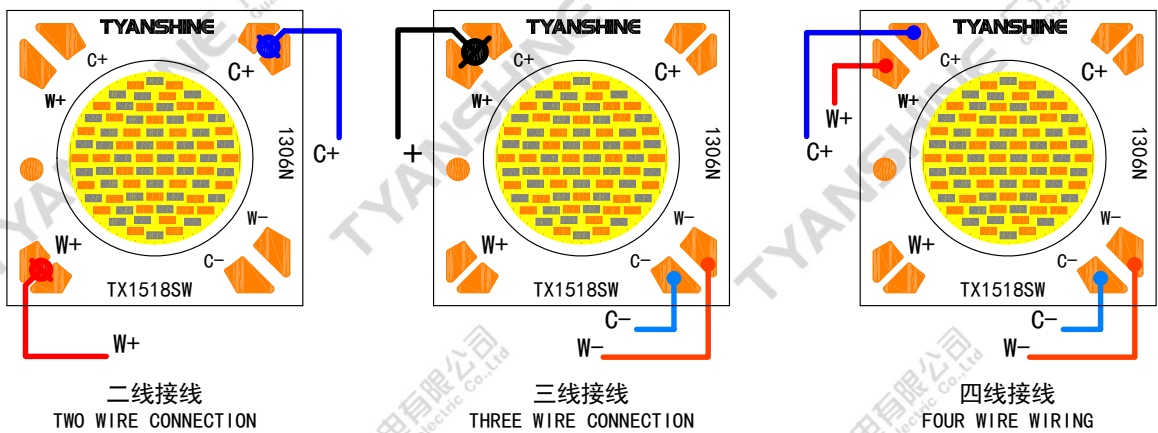

Code Formats:

TX-1518SW11F13-08H902760

TX	—	15	18	SW	11	F	13	—	08	H90	2760
TYANSHINE	—	series	Watt type	performance	LES	chip code	die count in series	—	BOM	Ra	CCT

Part No.	TX-1518SW11F13-08H902760	Spec No.	WKF-DA0198	Page	2 of 9
----------	--------------------------	----------	------------	------	--------

Absolute Maximum Ratings

Parameter	Symbol		Ratings	Unit
Forward Current	IF		500	mA
Reverse Voltage	VR		Not designed for reverse operation	V
Power Dissipation	PD	W	20	W
		C	20	
		W+C	20	
Junction Temperature	Tj	W	150	℃
		C	150	
Case Temperature (C)	Tc		85	℃
Electrostatic Discharge Threshold (ESD)	ESD		2000	V
Storage Temperature	Tstg		-30~+80	℃
Operation Temperature	Topr		-30~+85	

Notes:

- 1.Specifications are subject to change without notice.
- 2.The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- 3.Precautions for ESD:
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics (Tc=25°C)



Parameter	Symbol	Condition	Emitting color	Min.	Typ.	Max.	Units
Luminous Flux	Φ_v	If=350mA	W	1050	1250	1400	lm
			C	1400	1600	1800	
Forward Voltage	V_f		W	35	37	39	V
			C	35	37	39	
Correlated Colour Temperature	CCT		W	2620	—	2760	K
			C	5950	—	6450	
Viewing Angle at 50 % IV	$2\theta_{1/2}$		W	—	115	—	Deg
			C	—	115	—	
Reverse Current	I_R		—	—	—	—	μA
Thermal Resistance Junction to Case	$R\theta_{J-C}$	If=350mA	—	—	1.9	—	K/W
Color Rendering Index	Ra	If=350mA	W	90	—	—	—
			C	90	—	—	



Notes:



- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.Luminous flux measurement tolerance: $\pm 15\%$.
- 4.Forward voltage measurement tolerance: $\pm 3\%$.
- 5.Ra measurement tolerance: ± 2 .

Typical Electrical/Optical Characteristics Curves

(25℃ Ambient Temperature Unless Otherwise Noted)

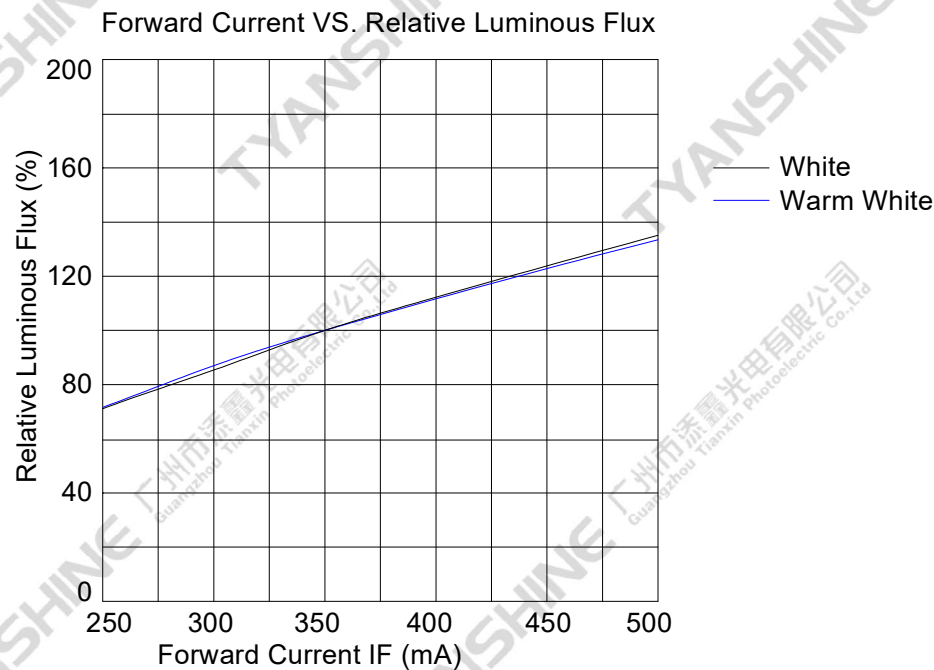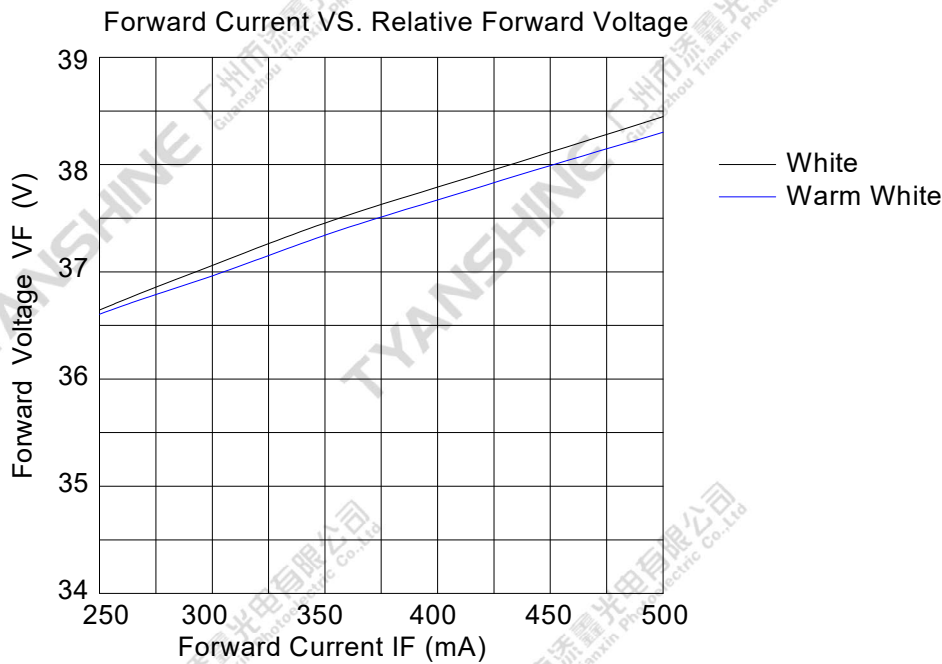

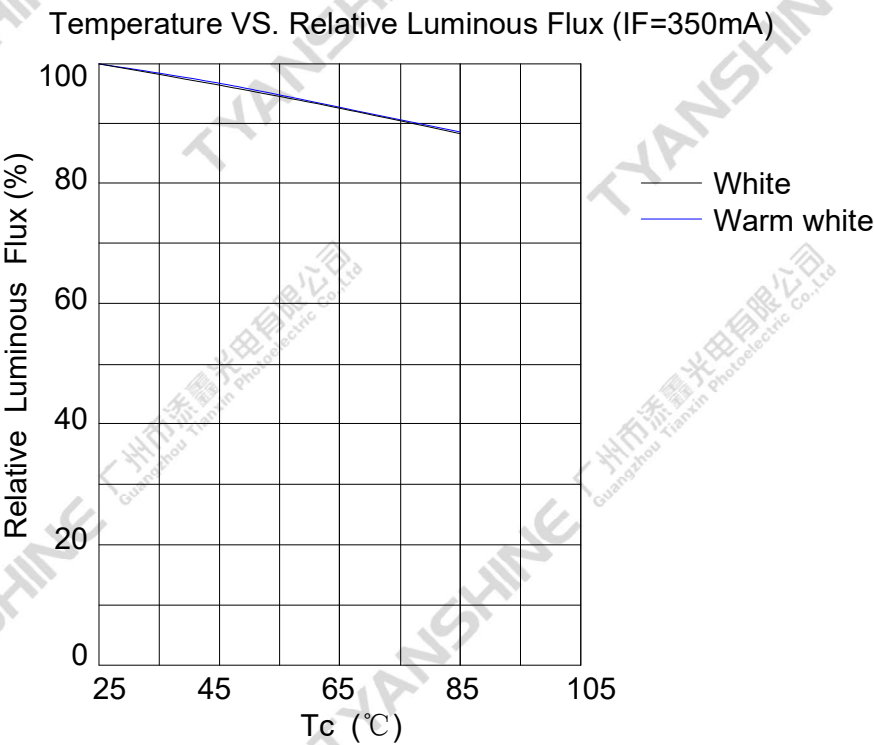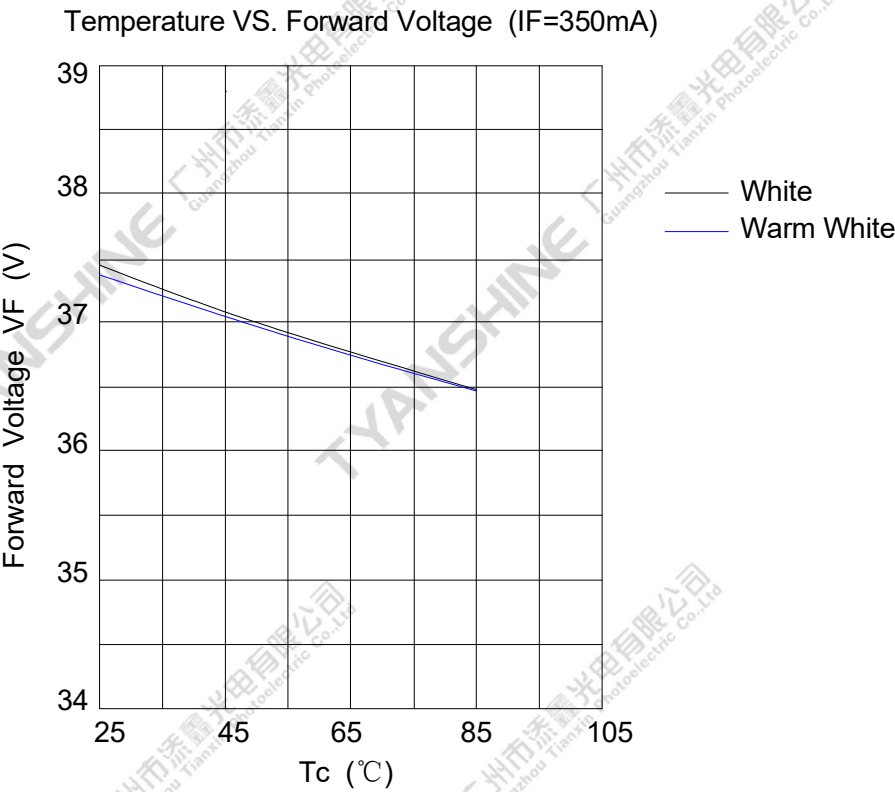


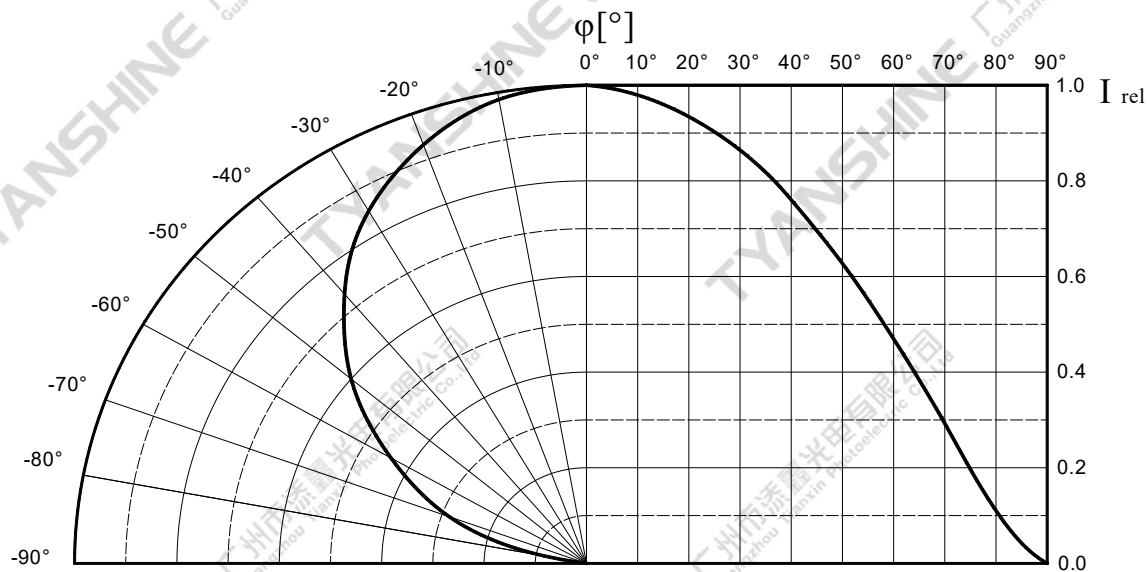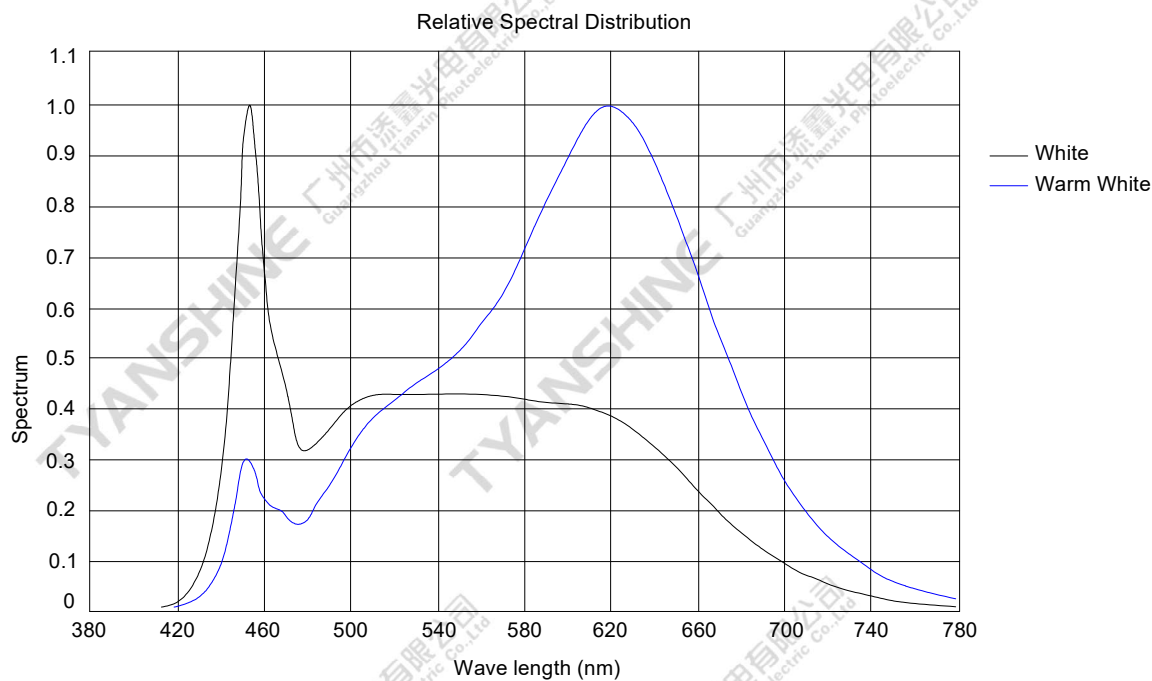

Notes:

- 1. $2\theta_{1/2}$ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
- 2. View angle tolerance is $\pm 5^\circ$.

Chromaticity Coordinates （Condition:IF=350mA,Tc=25℃）

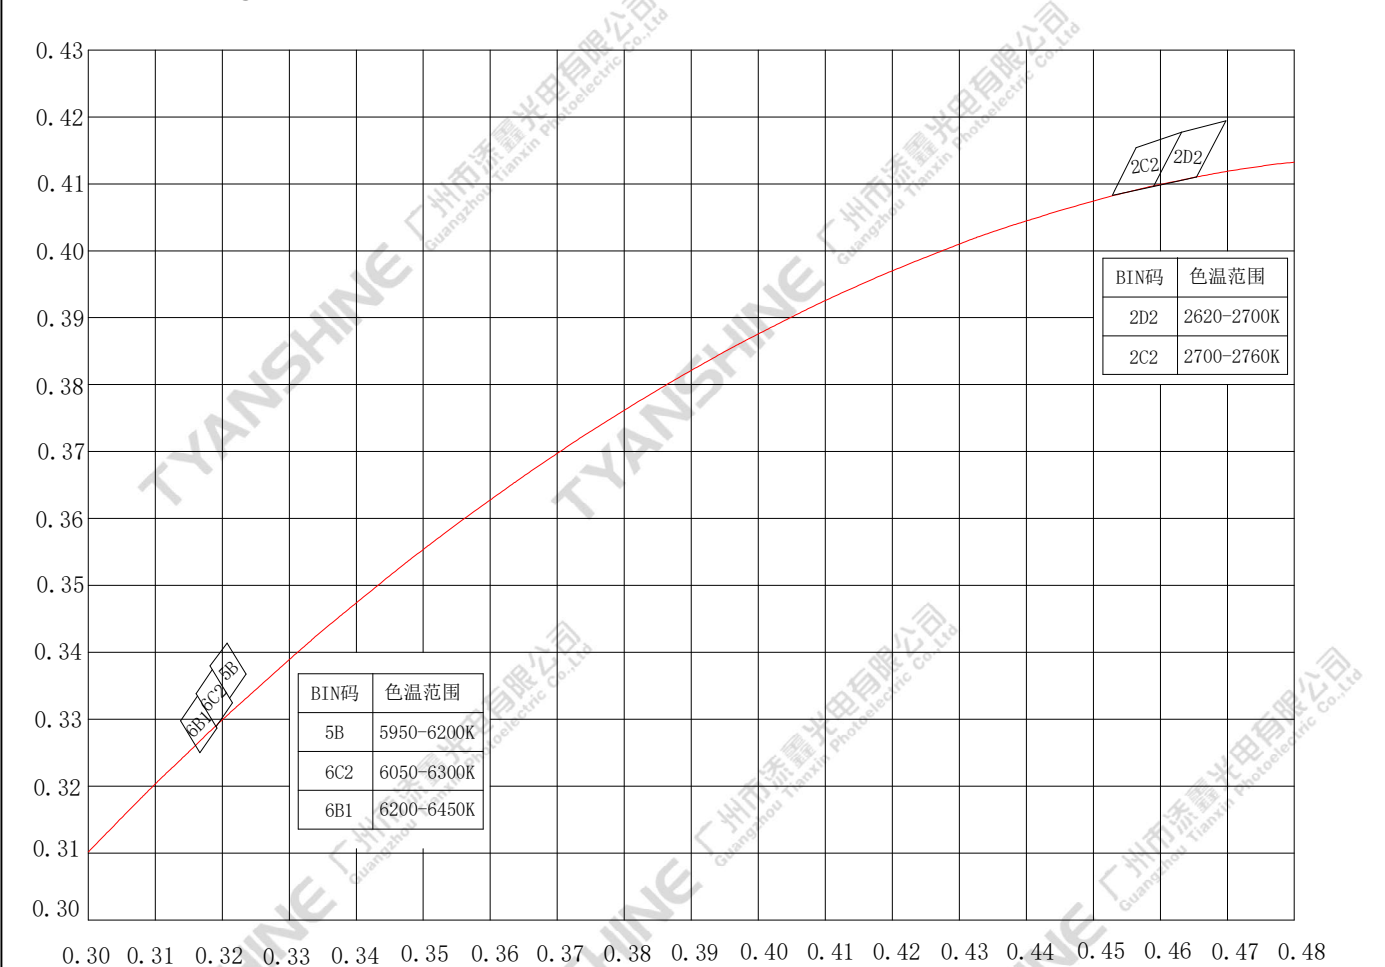

Notes:


1. Chromaticity (x,y) measurements tolerance: ± 0.005 .

Reliability Test

Test Item	Test Condition
Continuous Operation Test	IF=350mA Ta=25℃×1000hrs
Low Temperature Storage Test	-30℃×1000hrs
High Temperature Storage Test	100℃×1000hrs
Moisture-proof Test	85℃，85%RH for 500 hours
Thermal Shock Test	-40℃×15minutes-125℃×15minutes,100 cycle

Dimensions For Cannulation And Packaging

Quantity: 36PCS

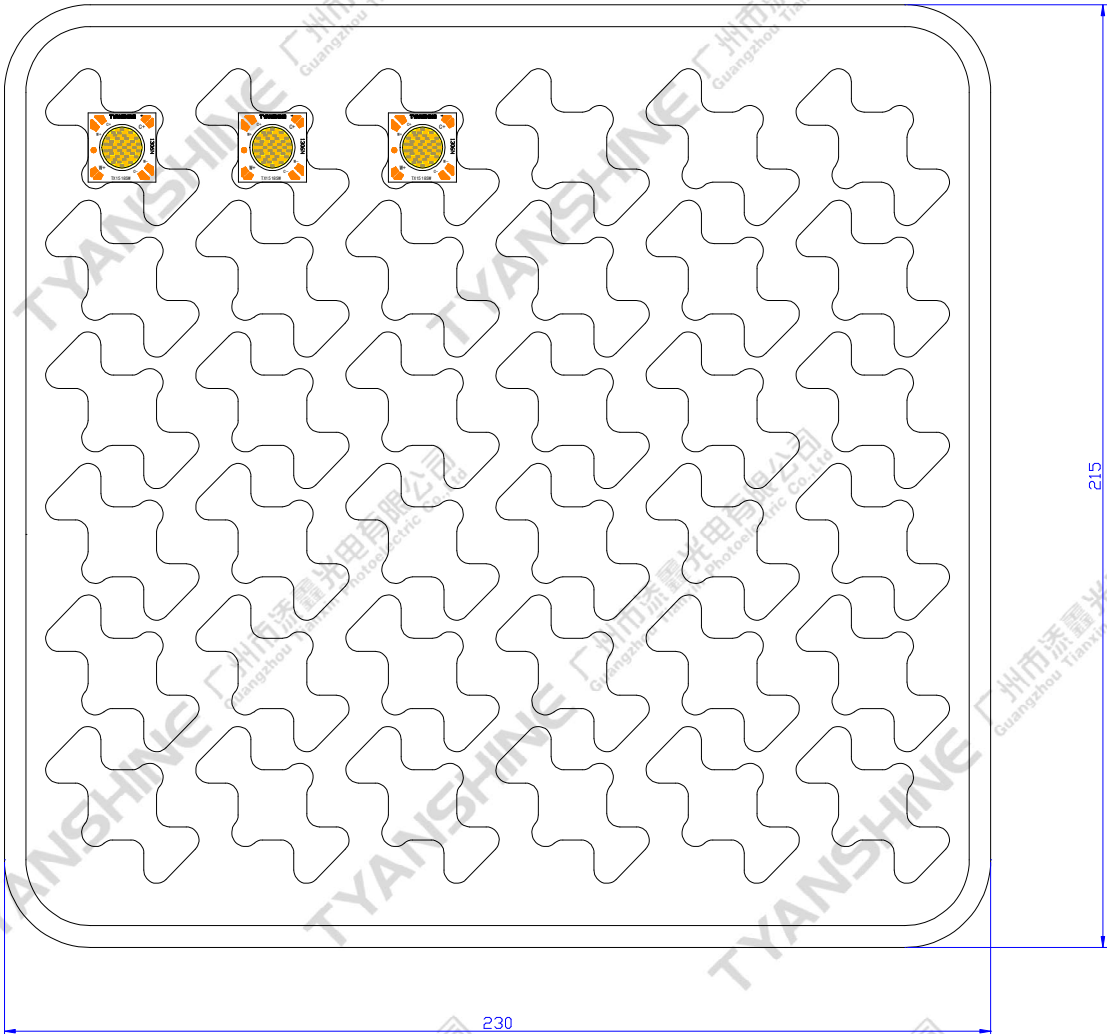

Notes:

- 1. All dimensions are in millimeters.
- 2. Tolerances are ± 2.0 mm unless otherwise noted.
- 3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.